



Color: Bronze

Weight: 233.0 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Compliance

CSA Listed:

Suitable for wet locations

Performance

Description:

Steel pole 5" round 7 gauge 20 foot drilled two sides square base

Construction

Shaft:

46,000 p.s.i. minimum yield.

Hand Holes:

Reinforced with grounding lug and removable cover

Base Plates:

36,000 p.s.i. minimum yield.

Color:

Bronze powder coating

Height:

20 ft

Gauge:

7

Wall Thickness:

3/16"

Shaft Size:

5"

Anchor Bolt Templates:

WARNING Template must be printed on 12" x 18" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available [online](#).

Max EPA's/Max Weights:

- 70MPH 25.0 ft/450 lb.
- 80MPH 18.2 ft/420 lb.
- 90MPH 13.6 ft/400 lb.
- 100MPH 10.2 ft/380 lb.
- 110MPH 7.8 ft/170 lb.
- 120MPH 5.9 ft/160lb.
- 130MPH 4.4 ft/150 lb.
- 140MPH 3.3 ft/135 lb.
- 150MPH 2.4 ft/50 lb

Accessories:

Base/Cap: [BCK-R5](#)
Anchor Bolts: [BOLT5-8](#)

Other


Terms of Sale:

Pole Terms of Sale is available [online](#).

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

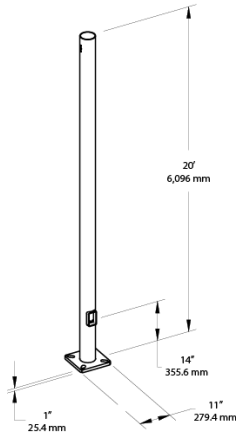

Features

- Designed for ground mounting
- Heavy duty TGIC polyester coating
- Reinforced hand holes with grounding lug and removable cover for easy wiring access
- Pole caps, base covers & bolts are sold separately
- Custom manufactured for each application

Ordering Matrix

Family	Shape	Size	Gauge	Height	Drilled/Welded Tenon
P	R	5	7	20	D2
	R = Round	4 = 4"	7 = 7	10 = 10'	D2 = Drilled
	TR = Tapered Round	5 = 5"	11 = 11	15 = 15'	WT = Welded Tenon
		6 = 6"		20 = 20'	
		7 = 7"		25 = 25'	
		8 = 8"		30 = 30'	