

| | | | |
|-----------------|--------------|---------------------|--------------|
| Project: | Type: | Prepared By: | Date: |
|-----------------|--------------|---------------------|--------------|



Features and Benefits

- Energy efficient replacement for incandescent and halogen reflector lamps
- Constructed from durable plastic which lowers risk of breakage
- Rated for use in enclosed and open fixtures in dry or damp locations
- Frosted lens produces smooth diffuse light
- Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs
- ENERGY STAR Compliant
- Dimmable with common dimmer types (see Dimmer Compatibility List)

| Technical Specifications | | |
|--|--|--|
| Performance <hr/> Product Type: Reflector Input Wattage: 7W Lumens (Nominal): 525lm Efficacy: 75lm/W L70 Lifespan: 25,000-Hour LED lifespan based on IES LM-70 results Wattage Equivalency: 50W LED Characteristics <hr/> Color Accuracy (CRI): 80 Color Temperature: 4000K | Electrical <hr/> Power Factor: >0.9 Dimmable: Yes, down to 10% Input Voltage: 120V Operating Temperature: -20°C to 40°C Construction <hr/> Bulb Shape: R20 Enclosure Material: Plastic Housing Finish: White Lens Finish: Frosted | Base Type: E26 Edison Optical <hr/> Beam Angle: 110° Other <hr/> Technology EQ: Incandescent Warranty: RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty . Compliance <hr/> UL Listed: Yes Environment/Fixture Rating: Damp / Enclosed |

Technical Specifications (continued)

Energy Star ID:

2329465

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15B of the FCC Rules


Model Number for Certification:

R20-7-840-DIM

Case and Pallet Dimensions

| | QTY | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|--------|------|-------------|------------|-------------|
| CASE | 10 | 13.2 | 5.5 | 4 |
| PALLET | 2500 | 46.3 | 39.6 | 35.3 |

Dimension

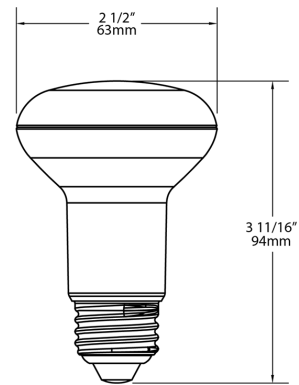

Light Distribution

