

Technical Specifications (continued)**Finish:**

White

Enclosure Material:

Metal

Trim Style:

Baffle

Lens:

Polycarbonate light diffuser distributes light evenly and smoothly for general lighting applications

Cut Out Template Size:

6 5/16"

Compliance**Listings:**

UL Recognized, UL Classified

Environment:

Suitable for use in dry, damp, and wet environments.

IC Rated:

No

Air Tight:

No

Energy Star Approved:

This product is ENERGY STAR® Version 2.2 Certified

Energy Star ID:

2369134

DLC Listed:

No

Certification Model Number:

DLR0119(R6R89FA120WB)

T20 Compliant:

Can be used to conform with the requirements of California Title 20

California Title 24 JA8 Compliant:

Can be used to conform with the requirements of California Title 24 Part 6

California Energy Commission (CEC) Status:

Lawful for Sales in California

NEC Compliant:

Suitable for use in closets. Compliant with NEC Sec. 410.16 (A)(1) and 410.16 (C3).

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15B of the FCC Rules

Other**Accessories:**[RFLED-RETROBAND](#)

Retrofit Band

[RFLED-GOOF-6R-8R-W](#)

6"-8" Goof Ring

[DLTRIM/R6RB-BN](#)

6" Round Baffle Brushed Nickel Color Trim

[DLTRIM/R6Rb-BRZ](#)

6" Round Baffle Bronze Color Trim

[DLTRIM/R6RB-B](#)

6" Round Baffle Black Color Trim

[DRI-25-EMGR-DC](#)

Battery Backup Driver

[DRI-21-EMGR-DC-D10](#)

Battery Backup Driver T20

Warranty:RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.**Note:**

All values are typical (tolerance +/- 10%)


Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.


Case and Pallet Dimensions

| | QTY | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|--------|-----|-------------|------------|-------------|
| CASE | 4 | 15.47 | 7.99 | 8 |
| PALLET | 600 | 7.56 | 3.82 | 82.28 |

Dimension

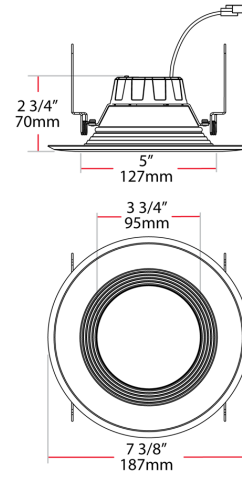

Light Distribution

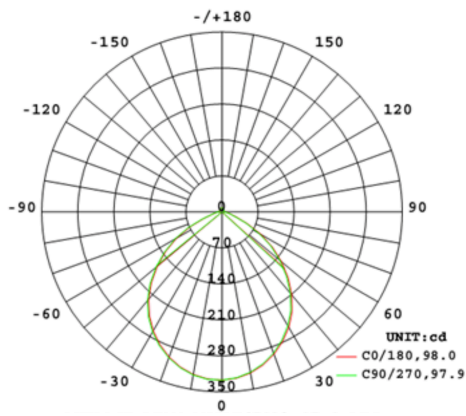

Features

- Use to replace traditional halogen and incandescent light sources
- Durable metal construction: dent and scratch resistant
- 5 Color temperature selectable 2700K, 3000K, 3500K, 4000K, & 5000K
- Compatible with most standard recessed housings
- Color trims sold separately

Ordering Matrix

| Family | Size | Shape | Wattage | CRI/Color Temp | Voltage | Finish | Trim |
|--------|------------------|-----------|--|------------------------------|------------|-----------|--------------------------|
| R | 6 | R | 8 | 9FA | 120 | W | B |
| | 4 = 4" 6 = 6" | R = Round | 8 = 8W 10 = 10W 11 = 11W 14 = 14W | 9FA = 90 CRI, CCT Adjustable | 120 = 120V | W = White | B = Baffle S = Smooth |