



Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	8W
120V	0.07A	Color Temp	2700K/3000K/3500K/4000K/5000K
208V	N/A	Color Accuracy	92 CRI
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	725 lm
Input Watts	8W	Efficacy	90.6 lm/W

Technical Specifications		
<p>Performance</p> <p>Product Type: Recessed Retrofit</p> <p>Description: Contractor-grade retrofit downlights offered with up to 5 field selectable color temperatures in 1 model.</p> <p>Wattage Equivalency: 65W Incandescent</p> <p>Input Wattage: 8W</p> <p>Lumens (Nominal): 2700K @ 738lm; 3000K @ 750lm; 3500K @ 761lm; 4000K @ 783lm; 5000K @ 793lm</p> <p>Efficacy: 2700K @ 96lm/W; 3000K @ 98lm/W; 3500K @ 100lm/W; 4000K @ 100lm/W; 5000K @ 105lm/W</p> <p>L70 Lifespan: 50,000-Hour LED lifespan based on IES LM-70 results</p> <p>Electrical</p> <p>Driver: Constant Current, 60 Hz, 120V, 120V: 0.07 A</p>	<p>THD: ≤20%</p> <p>Power Factor: ≥0.9</p> <p>Dimmable: Yes, dims down to 10% on compatible TRIAC/ELV system. See Dimmer Compatibility List.</p> <p>Input Voltage: 120V</p> <p>Operating Frequency: 60 Hz</p> <p>Input Current @ 120V (mA): 70mA</p> <p>Operating Temperature: -22°F to 104°F (-30°C to 40°C)</p> <p>LED Characteristics</p> <p>Color Temperature: Field Adjustable via dip switch 2700/3000/3500/4000/5000K</p> <p>Color Accuracy (CRI): >90 CRI</p>	<p>R9 Value: High color performance with R9 greater than or equal to 50</p> <p>Color Consistency: <4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color</p> <p>Color Stability: LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period</p> <p>Color Uniformity: RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.</p> <p>Installation</p> <p>Mounting: Recessed</p> <p>Construction</p> <p>Size: 6"</p> <p>Shape: Round</p>

Technical Specifications (continued)**Finish:**

White

Enclosure Material:

Metal

Trim Style:

Smooth

Lens:

Polycarbonate light diffuser distributes light evenly and smoothly for general lighting applications

Cut Out Template Size:

6 5/16"

Compliance**Listings:**

UL Recognized, UL Classified

Environment:

Suitable for use in dry, damp, and wet environments.

IC Rated:

No

Air Tight:

No

Energy Star Approved:

This product is ENERGY STAR® Version 2.2 Certified

Energy Star ID:

2369133

Model Number for Certification:

DLR0122(R6R89FA120WS)

T20 Compliant:

Can be used to conform with the requirements of California Title 20

California Title 24 JA8 Compliant:

Can be used to conform with the requirements of California Title 24 Part 6

California Energy Commission (CEC) Status:

Lawful for Sales in California

NEC Compliant:

Suitable for use in closets. Compliant with NEC Sec. 410.16 (A)(1) and 410.16 (C3).

IESNA LM-79 & lm-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA lm-79 and lm-80

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15B of the FCC Rules

Other**Accessories:****RFLED-RETROBAND**

Retrofit Band

RFLED-GOOF-6R-8R-W

6"-8" Goof Ring

DLTRIM/R6RS-BN

6" Round Smooth Brushed Nickel Color Trim

DLTRIM/R6RS-BRZ

6" Round Smooth Bronze Color Trim

DLTRIM/R6RS-B

6" Round Smooth Black Color Trim

DRI-25-EMGR-DC

Emergency Backup Driver

Warranty:RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.**Note:**

All values are typical (tolerance +/- 10%)


Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.


Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	4	15.47	7.99	8
PALLET	600	7.56	3.82	82.28

Dimension

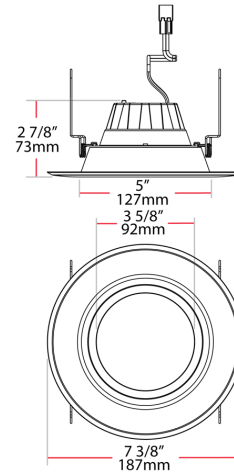

Light Distribution

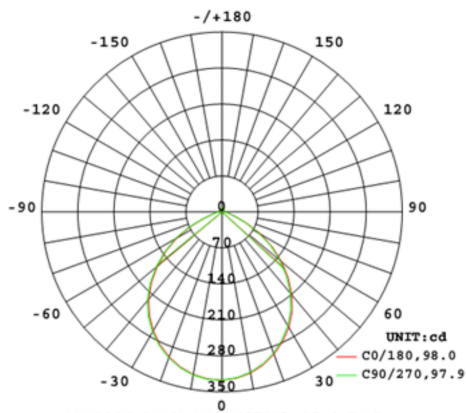

Features

- Use to replace traditional halogen and incandescent light sources
- Durable metal construction: dent and scratch resistant
- 5 Color temperature selectable 2700K, 3000K, 3500K, 4000K, & 5000K
- Compatible with most standard recessed housings
- Color trims sold separately

Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish	Trim
R	6	R	8	9FA	120	W	S
	4 = 4" 6 = 6"	R = Round	8 = 8W 10 = 10W 11 = 11W 14 = 14W	9FA = 90 CRI, CCT Adjustable	120 = 120V	W = White	B = Baffle S = Smooth