


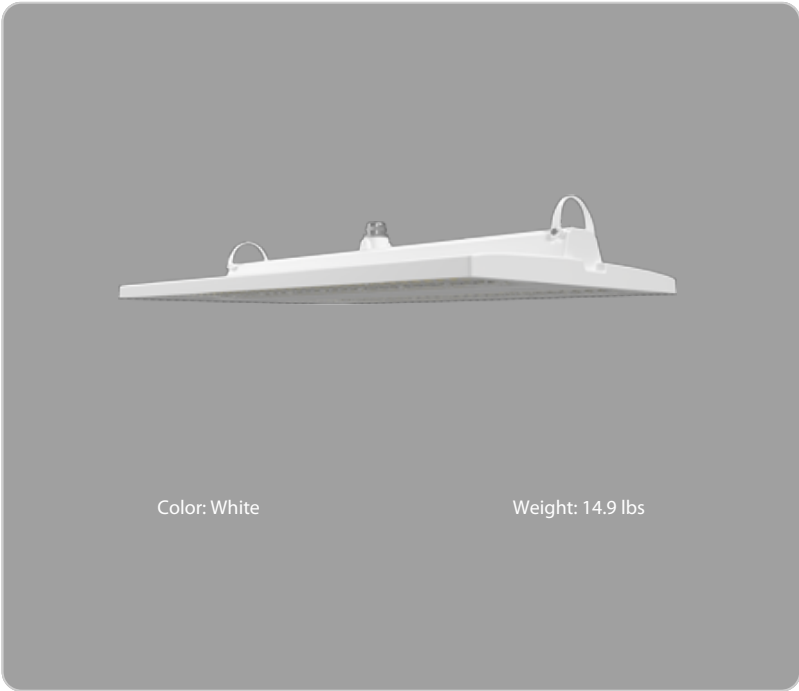

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	320/260/200W
120V	N/A	Color Temp	3500/4000/5000K
208V	N/A	Color Accuracy	84-85 CRI
240V	N/A	L70 Lifespan	100,000 Hours
277V	N/A	Lumens	31,543-48,594 lm
Input Watts	197.1-314.9W	Efficacy	143.9-167 lm/W

Technical Specifications			
Field Adjustability Field Adjustable: Field Adjustable Light Output: 320W/260W/200W (factory default 260W) Color temperature selectable by 3500K, 4000K and 5000K (factory default 4000K)		Color Uniformity: RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.	
Optical Field Adjustability: 55°, 85°, and 105° (factory default 85°)		Performance Lifespan: 100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations	
Compliance UL Listed: Suitable for wet locations		Electrical Driver: Constant Current, Class 1, 480V, 50/60 Hz: 320W: 480V: 0.70A 260W: 480V: 0.60A 200W: 480V: 0.50A	
IESNA LM-79 & LM-80 Testing: RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.		Construction Cold Weather Starting: The minimum starting temperature is -20°C (-4°F)	
DLC Listed: This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements. DLC Product Code: S-VBRWPZ		Maximum Ambient Temperature: Suitable for use in up to 122°F(50°C)	
LED Characteristics LEDs: Long-life, high-efficacy, discrete, surface-mount LEDs		Lens: Polycarbonate lens	
		Housing: Die-cast aluminum	
		Dimming Driver: Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.	
		Finish: Formulated for high durability and long-lasting color	
		THD: 7.52% at 480V	
		Green Technology: Mercury and UV free. RoHS-compliant components.	
		Power Factor: 96.5% at 480V	
		Other IP Rating: Ingress protection rating of IP66 & IP69K for high-pressure and high temperature cleaning	
		Aux Power Supply: Yes	


Technical Specifications (continued)

5-Year Limited Warranty:
The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Installation

Mounting:
Comes standard with V-hooks for chain mounting. Accessories available for pendant and surface mounting (purchased separately).

Dimensions

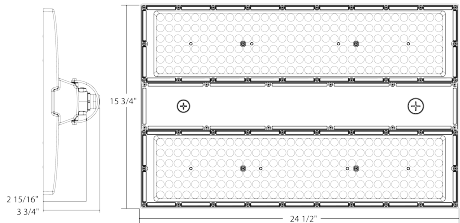

Features

- 100,000-Hour LED lifespan
- DLC Premium Listed
- 0-10V dimming, standard
- 5-Year, limited warranty

Ordering Matrix

Family	Wattage	Color Temp	Distribution	Finish	Driver
RBAY22	L				/480
S = 160/130/100W M = 260/220/160W L = 320/260/200W					
		Blank = 3500/4000/5000K CCT Adjustable	Blank = 55°/85°/105° Adjustable Beam Angle	Blank = White	Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming