



Cost-effective LED 2x2 troffer upgrade that's easily installed. Includes built-in support for Lightcloud, a wireless lighting control system and service, fully developed by RAB.

Color: White

Weight: 13.4 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

### Driver Info

Type	Constant Current
120V	0.24A
208V	0.15A
240V	0.13A
277V	0.11A
Input Watts	29W

### LED Info

Watts	29W
Color Temp	5000K (Cool)
Color Accuracy	85 CRI
L70 Lifespan	100,000 Hours
Lumens	3,847 lm
Efficacy	132.7 lm/W

## Technical Specifications

### Lightcloud

#### Lightcloud Controller Installed:

Fixture, Zone, and plug-load control from one powerful device. Capable of switching, 0-10V dimming, power monitoring. Can also be used to extend the range of the Lightcloud mesh network. Attach to fixture, junction box, or electrical panel. [Learn more about Lightcloud.](#)

### Compliance

#### UL Listed:

Suitable for damp locations

### Electrical

#### Driver:

Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.24A, 0.15A, 0.13A, 0.11A

#### THD:

17.8% at 120V, 12.3% at 277V

#### Power Factor:

98.3% at 120V, 93% at 277V

#### Surge Protection:

4kV

### Construction

#### Housing:

Steel sheet metal

#### Ambient Temperature:

Suitable for use in up to 40°C (104°F)

#### Reflector:

High-reflectance, powder-coated finish, optimized for uniform light distribution

#### Mounting:

Recessed ceiling

#### Lens:

Polycarbonate lens

#### Finish:

Formulated for high durability and long-lasting color

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

#### Other

#### Note:

All values are typical (tolerance +/- 10%)

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

#### Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

#### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

## Technical Specifications (continued)

### Performance


#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Wattage Equivalency:

Equivalent to (3) F17T8 or (3) F14T5

### Dimensions

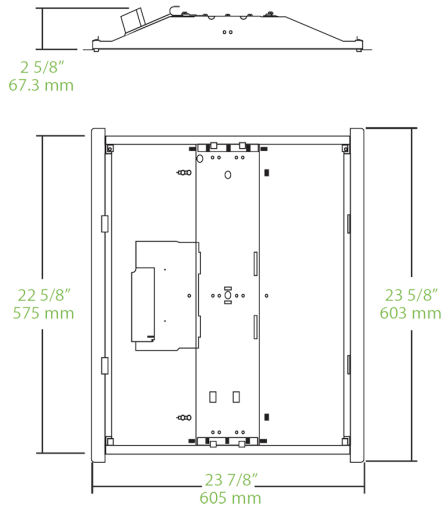

### Features

- Troffer Retrofit can be installed in under 3 minutes by 1 person
- Frosted polycarbonate lens provides a uniform distribution and reduces glare
- 0-10V dimming, standard
- 5-Year, No-Compromise Fixture Warranty and 10-Year, No-Compromise Lightcloud Warranty

### Ordering Matrix

Family	Size	Wattage	Color Temp	Finish	CRI	Dimming Driver	Options
RTLED	2X2	29		W		/D10	/LC
	1X4 = 1'x4' 2X2 = 2'x2' 2X4 = 2'x4'	19 = 19W (2x2, 1x4) 29 = 29W (2x2, 1x4) 39 = 39W (2x4) 49 = 49W (2x4)	Blank = 5000K Cool N = 4000K Neutral YN = 3500K Warm Neutral Y = 3000K Warm	W = White	Blank = 80 CRI /HC = 90 CRI (4000K only) <sup>1</sup>	/D10 = 0-10V Dimming	Blank = No Options /LC = Lightcloud® Controller /E2 = Battery Backup /MVS = Microwave Occupancy Sensor /MVS/E2 = Microwave Occupancy Sensor w/ Battery Backup

<sup>1</sup> 4000K only