



Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	49W
120V	0.41A	Color Temp	3500K (Warm Neutral)
208V	0.24A	Color Accuracy	84 CRI
240V	0.21A	L70 Lifespan	100,000 Hours
277V	0.18A	Lumens	6,611 lm
Input Watts	48.9W	Efficacy	135.2 lm/W

Technical Specifications

<p>Compliance</p> <hr/> <p>UL Listed: Suitable for damp locations</p> <p>Electrical</p> <hr/> <p>Driver: Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.41A, 0.24A, 0.21A, 0.18A</p> <p>THD: 8.2% at 120V, 9.3% at 277V</p> <p>Power Factor: 99.4% at 120V, 95.1% at 277V</p> <p>Surge Protection: 4kV</p> <p>Construction</p> <hr/> <p>Housing: Steel sheet metal</p> <p>Ambient Temperature: Suitable for use in up to 40°C (104°F)</p> <p>Reflector: High-reflectance, powder-coated finish, optimized for uniform light distribution</p> <p>Mounting: Recessed ceiling</p>	<p>Lens: Polycarbonate lens</p> <p>Finish: Formulated for high durability and long-lasting color</p> <p>Green Technology: Mercury and UV free. RoHS-compliant components.</p> <p>Other</p> <hr/> <p>Note: All values are typical (tolerance +/- 10%)</p> <p>Warranty: RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.</p> <p>Buy American Act Compliance: RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.</p>	<p>LED Characteristics</p> <hr/> <p>LEDs: Long-life, high-efficacy, surface-mount LEDs</p> <p>Color Stability: LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period</p> <p>Color Uniformity: RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.</p> <p>Performance</p> <hr/> <p>Lifespan: 100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations</p> <p>Wattage Equivalency: Equivalent to (3) F32T8 or (3) F28T5</p> <p>Sensor Specifications</p> <hr/> <p>Capacitance Load: 400VA at 120VAC, 800VA at 230VAC, 1000VA at 277VAC</p> <p>Operating Temperature: -20°C to +60°C (-4°F to +140°F)</p>
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Technical Specifications (continued)**Relay:**

Zero-cross relay

Maximum Mounting Height:

16.4 feet

Customizable Detection Area:

10, 50, 75 or 100%

Time Delay:

5s, 30s, 1min, 5min, 10min, 20min, 30min

Cut Off Period:

0s, 10s, 1min, 5min, 10min, 30min, 1hr, Bi-Level

Cut-Off Dimming level:

10, 20, 30, 50%

Cut-Off Power:

Less than 1W

Daylight Threshold:

About .2-5 fc for disabled

Sensor Principle:

High Frequency

Microwave Frequency:

5.8GHz +/- 75MHz

Microwave Power:

<0.2mW

Max Detection Range:

26 ft diameter at 16 ft mounting height


Detection Angle:

About 30 to 150 degrees

Remote Control Accessory:

Adjust settings using remote control (catalog# MVSREM). Only available with 0-10V dimming driver options. [Remote control available here.](#)

Dimensions

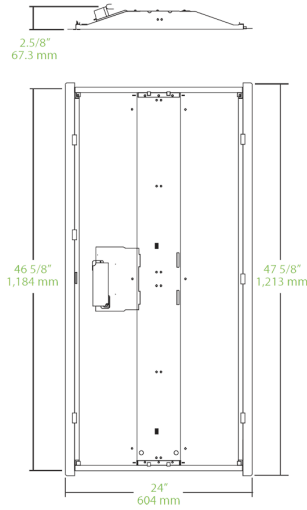

Features

- Troffer Retrofit can be installed in under 3 minutes by 1 person
- Frosted polycarbonate lens provides a uniform distribution and reduces glare
- 0-10V dimming, standard
- 5-Year, No-Compromise Warranty

Ordering Matrix

Family	Size	Wattage	Color Temp	Finish	CRI	Dimming Driver	Options
RTLED	2X4	49	YN	W		/D10	/MVS
	1X4 = 1'x4'	19 = 19W (2x2, 1x4)	Blank = 5000K Cool	W = White	Blank = 80 CRI	/D10 = 0-10V Dimming	Blank = No Options
	2X2 = 2'x2'	29 = 29W (2x2, 1x4)	N = 4000K Neutral		/HC = 90 CRI		/LC = Lightcloud® Controller
	2X4 = 2'x4'	39 = 39W (2x4)	YN = 3500K Warm		(4000K only) ¹		/E2 = Battery Backup
		49 = 49W (2x4)	Neutral				/MVS = Microwave Occupancy Sensor
			Y = 3000K Warm				/MVS/E2 = Microwave Occupancy Sensor w/ Battery Backup

¹ 4000K only