




Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	5W
120V	0.04A	Color Temp	3000K
208V	0.02A	Color Accuracy	86 CRI
240V	0.02A	L70 Lifespan	100,000 Hours
277V	0.02A	Lumens	174 lm
Input Watts	5.4W	Efficacy	32.3

Technical Specifications

<p>Compliance</p> <p>UL Listed: Suitable for wet locations</p> <p>IP Rating: Ingress protection rating of IP65 for dust and water</p> <p>IESNA LM-79 & LM-80 Testing: RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.</p> <p>LED Characteristics</p> <p>LEDs: Long-life, high-efficacy, discrete, surface-mount LEDs</p> <p>Color Consistency: 7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color</p> <p>Color Uniformity: RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for (SSL) Products, ANSI C78.377-2017.</p> <p>Electrical</p> <p>Driver: Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.04A, 208V: 0.02A, 240V: 0.02A, 277V: 0.02A</p>	<p>THD: 6.6% at 120V, 13.9% at 277V</p> <p>Power Factor: 99.4% at 120V, 94.0% at 277V</p> <p>Dim to Off: No</p> <p>Aux Power Supply: No</p> <p>Construction</p> <p>Cold Weather Starting: The minimum starting temperature is -40°C (-40°F)</p> <p>Maximum Ambient Temperature: Suitable for use in up to 45°C (113°F)</p> <p>Housing: Die-cast aluminum</p> <p>Lens: Polycarbonate lens</p> <p>Gaskets: High-temperature silicone</p>	<p>Finish: Formulated for high durability and long-lasting color</p> <p>Green Technology: Mercury and UV free. RoHS-compliant components.</p> <p>Installation</p> <p>Mounting: Rectangular J-Box or bracket for the wall-mount (J-Box not provided)</p> <p>Other</p> <p>5 Yr Limited Warranty: The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.</p> <p>Buy American Act Compliance: RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.</p>
--	--	---

Dimensions

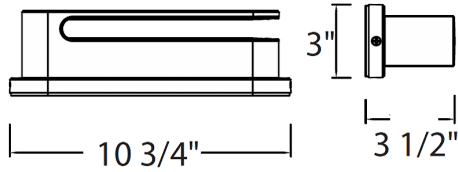

Features

- IP65 rated
- 100,000-Hour LED lifespan
- 5-Year Limited Warranty

Ordering Matrix

Family	Shape	Type	Color Temp	Finish	Voltage
SA	CL	WP			

CL = CLIP
 BS = Bollard Short
 Blank = 3000K
 Blank = Matte Bronze
 Blank = 120-277V
BT = Bollard Tall
WP = Wall Sconce