
SA-PB/RGB

RAB

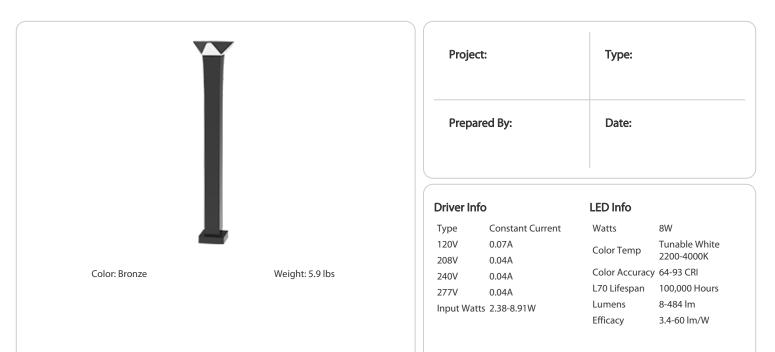

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations

IP Rating:

Ingress protection rating of IP65 for dust and water

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

LED Characteristics

LEDs:

Long-life, high-efficacy, discrete, surface-mount LEDs

Color Tuning:

Yes, 2200K-4000K and 16+ million colors to choose from using the Lightcloud Blue mobile app. Default Setting at 3000K.

Color Consistency:

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for (SSL) Products, ANSI C78.377-2017.

Electrical

Driver:

```
Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.07A, 208V: 0.04A, 240V: 0.04A, 277V: 0.04A
```

THD: 12.2% at 120V, 12.9% at 277V

Power Factor: 97.4% at 120V, 72.6% at 277V

Dim to Off: No

Aux Power Supply: No

Construction

Cold Weather Starting: The minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature:

Suitable for use in up to $45^{\circ}C$ (113°F)

Housing: Die-cast aluminum

Lens: Polycarbonate lens

Gaskets:

High-temperature silicone

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Installation

Mounting:

4pcs anchor bolts for mounting

Other

5 Yr Limited Warranty:


The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty.</u>

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

SA-PB/RGB



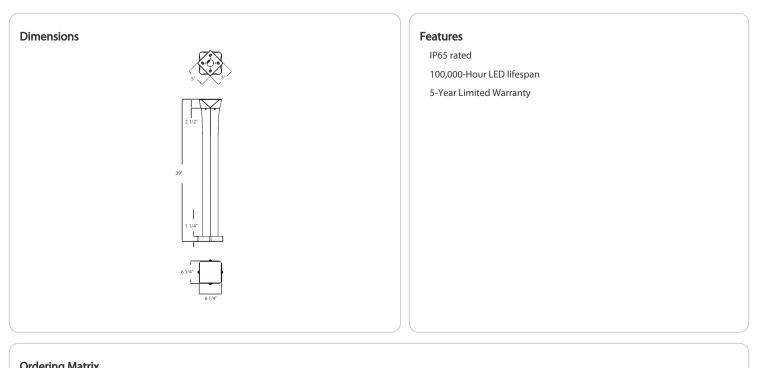

Orderin	dering Matrix					
Family	Shape	Туре	Color Temp	Finish	Voltage	Options
SA	Р	В	Blank			/RGB
	P = POUF	B = Bollard D = Deck Light	Blank = 3000K Blank = 2200-4000K Tunable White ¹	Blank = Matte Bronze	Blank = 120-277V	Blank = No Option /RGB = 16+ million colors
			' Ap	plies to RGB models on	ly	