



Color: Bronze

Weight: 2.8 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	8W
120V	0.07A	Color Temp	Tunable White 2200-4000K
208V	0.04A	Color Accuracy	62-94 CRI
240V	0.04A	L70 Lifespan	100,000 Hours
277V	0.04A	Lumens	9-514 lm
Input Watts	2.39-8.93W	Efficacy	3.8-63.3 lm/W

## Technical Specifications

### Compliance

**UL Listed:**

Suitable for wet locations

**IP Rating:**

Ingress protection rating of IP65 for dust and water

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

### LED Characteristics

**LEDs:**

Long-life, high-efficacy, discrete, surface-mount LEDs

**Color Tuning:**

Yes, 2200K-4000K and 16+ million colors to choose from using the Lightcloud Blue mobile app. Default Setting at 3000K.

**Color Consistency:**

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for (SSL) Products, ANSI C78.377-2017.

### Electrical

**Driver:**

Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.07A, 208V: 0.04A, 240V: 0.04A, 277V: 0.04A

**THD:**

12.2% at 120V, 12.6% at 277V

**Power Factor:**

97.4% at 120V, 72.7% at 277V

**Dim to Off:**

No

**Aux Power Supply:**

No

### Construction

**Cold Weather Starting:**

The minimum starting temperature is -40°C (-40°F)

**Maximum Ambient Temperature:**

Suitable for use in up to 45°C (113°F)

**Housing:**

Die-cast aluminum

**Lens:**

Polycarbonate lens

**Gaskets:**

High-temperature silicone

**Finish:**

Formulated for high durability and long-lasting color

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

### Installation

**Mounting:**

Octangular J-Box or bracket for the wall-mount (J-Box not provided). Bracket mounting as deck light.

### Other


**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Dimensions**

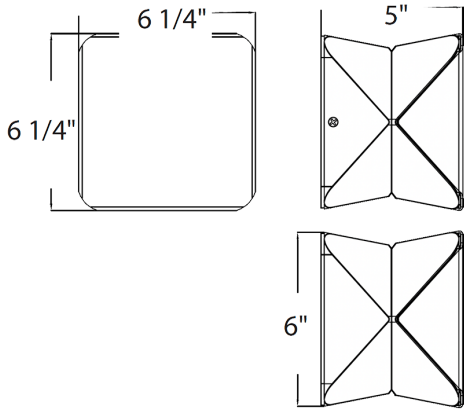

**Features**

- IP65 rated
- 100,000-Hour LED lifespan
- 5-Year Limited Warranty

**Ordering Matrix**

Family	Shape	Type	Color Temp	Finish	Voltage	Options
SA	P	D	Blank			/RGB
	P = POUF	B = Bollard D = Deck Light	Blank = 3000K Blank = 2200-4000K Tunable White <sup>1</sup>	Blank = Matte Bronze	Blank = 120-277V	Blank = No Option /RGB = 16+ million colors

<sup>1</sup> Applies to RGB models only