

This economical linear LED washdown fixture is ideal for canopies, loading docks, tunnels, stairwells and other hard-to-reach areas where relamping is difficult and costly. Includes built in support for Lightcloud, RAB's commercial wireless lighting control system. Lightcloud is a commercial wireless lighting control system and service fully developed and supported by RAB. It's powerful and flexible, yet easy to use and install.

Color: White

Weight: 6.8 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	50W
120V	0.44A	Color Temp	5000K (Cool)
208V	0.26A	Color Accuracy	82 CRI
240V	0.23A	L70 Lifespan	50,000 Hours
277V	0.19A	Lumens	5,849 lm
Input Watts	49.1W	Efficacy	119.1 lm/W

## Technical Specifications

### Lightcloud

#### Lightcloud Controller Installed:

Integrated/embedded networked lighting control, luminaire-level lighting control. Fixture, Zone, and plug-load control from one powerful device. LLLC - capable of switching, 0-10V dimming, power/energy monitoring. Can also be used to extend the range of the Lightcloud mesh network communication protocols. Offers the capability to set the maximum light output to a less-than-maximum state of an individual luminaire at the time of installation or commissioning. The High-End trim functionality is field reconfigurable via the Lightcloud mesh network communication protocols. The Lightcloud controller can be attached to the fixture, junction box, or electrical panel.

DLC system - N1XMLOEATBA

[Learn more about Lightcloud.](#)

### Compliance

#### UL Listed:

Suitable for wet locations

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

#### IP Rating:

Ingress protection rating of IP65 for dust and water (suitable for damp locations only when installed with Lightcloud Sensor)

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PRTHPOQN (Stairwell and Passageway Luminaires)

DLC Product Code: PJ6IP54V (Direct Linear Ambient Luminaires)

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

#### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Performance

#### Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Wattage Equivalency:

Equivalent to 32W 2 Lamp T8

### Construction

#### Housing:

Impact-resistant polycarbonate with stainless steel door clips. 1/2" opening/ drill out (drill out by customer) for conduit and bushing/cord entry. [Click here for a detailed list of damaging chemicals.](#)

#### Mounting:

Quick-mount, stainless steel snap on brackets supplied for surface mounting. V-Hook brackets supplied standard for suspending the fixture.

#### Lens:

Diffuse polycarbonate lens for low glare and maximum protection

#### Gaskets:

High-temperature silicone gaskets

#### Cold Weather Starting:

The minimum starting temperature is -20°C (-4°F)

#### Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

#### Installation:

Tether Cables are provided for easy installation. Quick connector may be used for quick and easy wiring.

## Technical Specifications (continued)

### Green Technology:

Mercury and UV free. RoHS-compliant components.

### Finish:

Formulated for high durability and long-lasting color

### Other

#### 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

### Electrical

#### Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.44A, 208V: 0.26A, 240V: 0.23A, 277V: 0.19A



#### THD:

9.4% at 120V, 12.1% at 277V

#### Power Factor:

99.4% at 120V, 97.3% at 277V

## Dimensions

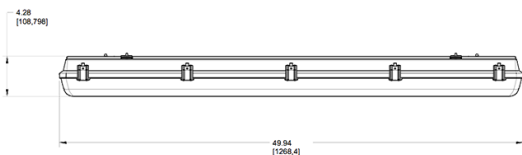

## Features

- Impact resistant polycarbonate housing
- Diffuse polycarbonate lens for protection and minimal glare
- Quick mount solutions - surface & suspended
- 0-10V dimming
- Integrated Lightcloud® Controller
- Easy Lightcloud® system setup - simply power on, confirm device connectivity and call 844-LIGHTCLOUD

## Ordering Matrix

Family	Length		Wattage	Color Temp	Driver	Options
SEAL	4	-	50		/D10	/LC
	4 = 4 ft 8 = 8 ft		25 = 25W 50 = 50W 100 = 100W	Blank = 5000K Cool N = 4000K Neutral	/D10 = 0-10V Dimming 120-277V	Blank = No Option /LC = Lightcloud Controller /LCS = Lightcloud Sensor 120-277V <sup>1</sup>

<sup>1</sup> Suitable for damp locations only.