



Project:	Туре:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	36W
120V	0.31A	Color Temp	4000K (Neutral)
208V	0.18A	Color Accuracy	85 CRI
240V	0.15A	L70 Lifespan	100,000 Hours
277V	0.14A	Lumens	5,109 lm
Input Watts	35.7W	Efficacy	143.1 lm/W

# **Technical Specifications**

### Compliance

#### **UL Listed:**

Marine Listed Outside Type (Saltwater)

#### UL 94:

5VA flame classification

# IP Rating:

Ingress protection rating of IP66 for dust and water

## **NEMA Rating:**

4X, protected against corrosion

# DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

DLC Product Code: PIETNWS4 DLC Product Code: P43O9Q9G

# Construction

# Length:

4 ft

#### Reflector:

Specular polycarbonate

### Housing:

IK09 impact-resistant polycarbonate with 5VA flame rating\*

1/2" openings for conduit and bushing/cord entry \*Polycarbonate is affected by cleaning agents or other liquids containing partial solvents such as low molecular weight aldehydes and ethers, ketones, esters, aromatic hydrocarbons and perchlorinated hydrocarbons. Click here for a detailed list of damaging chemicals.

# Mounting:

Quick-mount, surface, stainless steel spring clips and V-Hook with bracket screws are supplied. 3 additional mounting accessory kits available.

### Lens:

Textured, diffuse polycarbonate lens for low glare and maximum protection

#### Gaskets:

EVA

### **Cold Weather Starting:**

The minimum starting temperature is -30°C (-22°F)

# **Maximum Ambient Temperature:**

Suitable for use in up to 40°C (104°F)

#### inich:

Formulated for high durability and long-lasting color

#### **LED Characteristics**

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

# **Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### **Electrical**

### Driver:

Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.31A, 208V: 0.18A, 240V: 0.15A, 277V: 0.14A

#### THD:

3.7% at 120V, 4.15% at 277V

#### **Power Factor:**

99.9% at 120V, 97.7% at 277V

### **Surge Protection:**

4kV



# **Technical Specifications (continued)**

#### Performance

#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations


#### Other

# Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

# **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

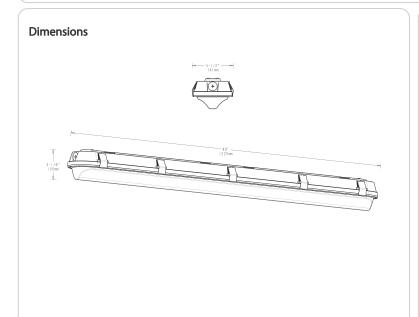

#### **Features**

**UL Marine Listed** 

Impact-resistant linear washdown

Ideal for tunnels and stairwells

 $\label{thm:mounting} \mbox{Mounting options: Chain, junction box, angled surface mount or vandal-resistant surface mount}$ 

IP66 Rating protects against dust & water ingress

5-Year, No-Compromise Warranty

100,000-Hour LED lifespan