



## Technical Specifications (continued)

### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

---

### Electrical

#### Driver:

Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.62A, 208V: 0.34A, 240V: 0.30A, 277V: 0.29A

#### THD:

0.82% at 120V, 3% at 277V

#### Power Factor:

99.8% at 120V, 94.3% at 277V

#### Surge Protection:

4kV

---

### Performance

#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

---

### Other


#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

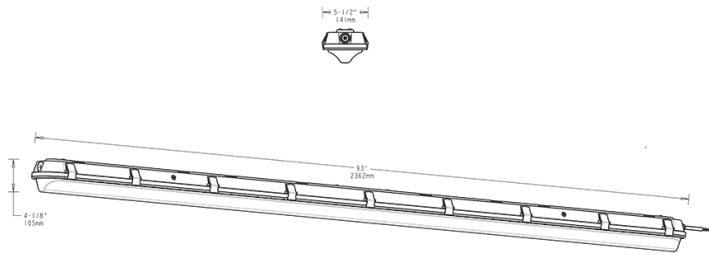

## Features

- American Bureau of Shipping (ABS) approved
- Ideal for tunnels and stairwells
- Mounting options:  
Chain, junction box, angled surface mount, ceiling mount or vandal-resistant surface mount
- IP66 AND NEMA 4X ratings protect against dust, water ingress & corrosion
- 5-Year, No-Compromise Fixture Warranty and 10-Year, No-Compromise Lightcloud Warranty
- 100,000-Hour LED lifespan
- Built in support Lightcloud\_
- Easy setup - simply power on, confirm device connectivity and call 844-LIGHTCLOUD

## Ordering Matrix

| Family | Length                           | UL Listing                            | Wattage  | Color Temp   | Finish    | Driver Options   | Options  |
|--------|----------------------------------|---------------------------------------|--|--|-----------|--|--|
| SHARK  | 8                                | -                                     | 70   |  | W         | /D10   | /LC  |
|        | 2 = 2 ft<br>4 = 4 ft<br>8 = 8 ft | Blank = Standard<br>M = Marine Listed | 18 = 18W (2 ft)<br>25 = 25W (2 ft)<br>36 = 36W (4 ft)<br>50 = 50W (4 ft)<br>70 = 70W (8 ft)<br>100 = 100W (8 ft) | Blank = 5000K Cool<br>N = 4000K Neutral<br>YN = 3500K Warm Neutral | W = White | /D10 = 0-10V Dimming, 120-277V<br>/480/D10 = 0-10V Dimming, 480V | Blank = No Option<br>/E2 = Battery Backup<br>/LC = Lightcloud® Controller, 120-277V<br>/LCS = Lightcloud® Sensor, 120-277V<br>/MVS = Microwave Occupancy Sensor, 120-277V<br>/LC/E2 = Lightcloud® Controller w/ Battery Backup, 120-277V<br>/LCS/E2 = Lightcloud® Sensor w/ Battery Backup, 120-277V<br>/MVS/E2 = Microwave Occupancy Sensor w/ Battery Backup, 120-277V |