



Color: Bronze

Weight: 13.9 lbs

Project:	Type:
Prepared By:	Date:

Driver Info	LED Info
Type	Constant
120V	1.41A
208V	0.84A
240V	0.76A
277V	0.68A
Input Watts	75.7-156W
Watts	150/125/100/75W
Color Temp	3000/4000/5000K
Color Accuracy	83-86 CRI
L70 Lifespan	100,000 Hours
Lumens	11,462-21,727 lm
Efficacy	124.4-169.2 lm/W

Technical Specifications

Field Adjustability

Optical Field Adjustability:
45°, 30°, 15° and 0° (factory default 0°)

Field Adjustable:
Field Adjustable Light Output:
150W/125W/100W/75W (factory default 150W)
Color Temperature Selectable:
3000K, 4000K and 5000K (factory default 4000K)

Performance

Lifespan:
100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Wattage Equivalency:
150W: Replaces up to 750W Metal Halide (MH) or 400W High Pressure Sodium (HPS)
125W: Replaces up to 750W Metal Halide (MH) or 400W High Pressure Sodium (HPS)
100W: Replaces up to 400W Metal Halide (MH) or 400W High Pressure Sodium (HPS)
75W: Replaces up to 400W Metal Halide (MH) or 310W High Pressure Sodium (HPS)

LED Characteristics

LEDs:
Edge-lit long-life, high-efficacy, surface-mount LEDs; binned and mixed for uniform light output and color.

Electrical

Driver:
150W: Class 2, Constant Current, 120-277V, 50/60 Hz, 120V: 1.41A, 208V: 0.84A, 240V: 0.76A, 277V: 0.68A
125W: Class 2, Constant Current, 120-277V, 50/60 Hz, 120V: 1.20A, 208V: 0.74A, 240V: 0.64A, 277V: 0.59A
100W: Class 2, Constant Current, 120-277V, 50/60 Hz, 120V: 0.94A, 208V: 0.60A, 240V: 0.54A, 277V: 0.50A
75W: Class 2, Constant Current, 120-277V, 50/60 Hz, 120V: 0.69A, 208V: 0.45A, 240V: 0.43A, 277V: 0.40A

Dimming Driver:
Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:
150W: 4.31% at 120V, 6.45% at 277V
125W: 4.3% at 120V, 6.76% at 277V
100W: 4.17% at 120V, 7.78% at 277V
75W: 4.4% at 120V, 9.89% at 277V

Power Factor:
150W: 99.8% at 120V, 96.4% at 277V
125W: 99.8% at 120V, 95.6% at 277V
100W: 99.7% at 120V, 93.8% at 277V
75W: 99.5% at 120V, 89.9% at 277V

Aux Power Supply:
Yes

Dim to Off:
Yes

Photocell:
120-277V selectable photocell that can be turned on and off.

Surge Protection:
DM(L/N): 6KV, CM(L/N-PE): 6KV

Construction

Cold Weather Starting:
The minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature:
Suitable for use in up to 40°C (104°F)

Housing:
Die-cast aluminum

Lens:
Polycarbonate lens

Gaskets:
High-temperature silicone

Technical Specifications (continued)

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Compliance**UL Listed:**

Suitable for wet locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

IP Rating:

Ingress protection rating of IP65 for dust and water

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-V296F6

Installation**Mounting:**

Hinged wiring access and conduit entries on the back, sides, top and bottom make installation a snap

Optical**BUG Rating:**

150W: B4 U0 G3

125W: B4 U0 G3

100W: B4 U0 G2

75W: B3 U0 G2


Other**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

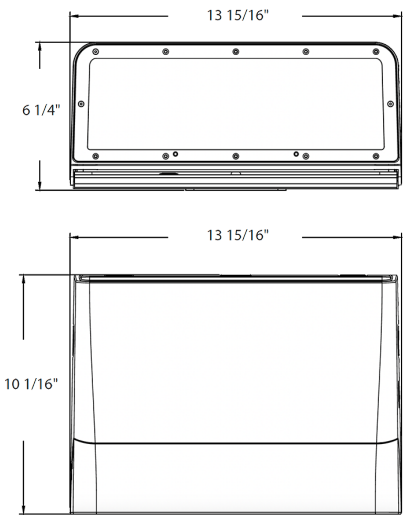

Features

- DLC Premium listed
- 0-10V dimming standard
- 100,000-hour LED Life
- 5-Year, limited warranty

Ordering Matrix

Family		Housing Size		Wattage	Color Temp	Finish	Forward Throw	Driver	Options
SLIM22	-	L	-	150					
		S = Small M = Medium L = Large		30 = 30/25/20/15W 60 = 60/50/40/30W 100 = 100/85/70/50W 150 = 150/125/100/75W	Blank = 3000/4000/5000K CCT Adjustable	Blank = Bronze W = White	Blank = Adjustable Throw 0°/15°/30°/45°	Blank = 120-277V, 0-10V /480 = 480V, 0-10V Dimming	Blank = Selectable Photocell /E = Selectable Photocell w/Battery Backup