



Color: Bronze

Weight: 9.7 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

| | |
|-------------|-------------|
| Type | Constant |
| 120V | 0.94A |
| 208V | 0.56A |
| 240V | 0.51A |
| 277V | 0.46A |
| Input Watts | 48.2-103.2W |

LED Info

| | |
|----------------|------------------|
| Watts | 100/85/70/50W |
| Color Temp | 3000/4000/5000K |
| Color Accuracy | 83-86 CRI |
| L70 Lifespan | 100,000 Hours |
| Lumens | 7,219-14,382 lm |
| Efficacy | 123.1-169.3 lm/W |

Technical Specifications

Field Adjustability

Optical Field Adjustability:

45°, 30°, 15° and 0° (factory default 0°)

Field Adjustable:

Field Adjustable Light Output:

100W/85W/70W/50W (factory default 100W)

Color Temperature Selectable:

3000K, 4000K and 5000K (factory default 4000K)

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Wattage Equivalency:

100W: Replaces up to 400W Metal Halide (MH) or 310W High Pressure Sodium (HPS)

85W: Replaces up to 400W Metal Halide (MH) or 310W High Pressure Sodium (HPS)

70W: Replaces up to 400W Metal Halide (MH) or 250W High Pressure Sodium (HPS)

50W: Replaces up to 350W Metal Halide (MH) or 200W High Pressure Sodium (HPS)

LED Characteristics

LEDs:

Edge-lit long-life, high-efficacy, surface-mount LEDs; binned and mixed for uniform light output and color.

Electrical

Driver:

100W: Class 2, Constant Current, 120-277V, 50/60 Hz, 120V: 0.94A, 208V: 0.56A, 240V: 0.51A, 277V: 0.46A
85W: Class 2, Constant Current, 120-277V, 50/60 Hz, 120V: 0.80A, 208V: 0.48A, 240V: 0.43A, 277V: 0.40A
70W: Class 2, Constant Current, 120-277V, 50/60 Hz, 120V: 0.66A, 208V: 0.39A, 240V: 0.36A, 277V: 0.35A
50W: Class 2, Constant Current, 120-277V, 50/60 Hz, 120V: 0.47A, 208V: 0.30A, 240V: 0.28A, 277V: 0.26A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

100W: 3.12% at 120V, 5.81% at 277V
85W: 3.23% at 120V, 6.81% at 277V
70W: 3.43% at 120V, 8.85% at 277V
50W: 3.92% at 120V, 14.72% at 277V

Power Factor:

100W: 99.8% at 120V, 94.9% at 277V
85W: 99.7% at 120V, 93.6% at 277V
70W: 99.6% at 120V, 91.5% at 277V
50W: 99.2% at 120V, 83.3% at 277V

Aux Power Supply:

Yes

Dim to Off:

Yes

Photocell:

120-277V selectable photocell that can be turned on and off.

Surge Protection:

DM(L/N): 6KV, CM(L/N-PE): 6KV

Construction

Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Housing:

Die-cast aluminum

Lens:

Polycarbonate lens

Gaskets:

High-temperature silicone

Technical Specifications (continued)

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Compliance**UL Listed:**

Suitable for wet locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

IP Rating:

Ingress protection rating of IP65 for dust and water

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-N7LBHX

Installation**Mounting:**

Hinged wiring access and conduit entries on the back, sides, top and bottom make installation a snap

Optical**BUG Rating:**

100W: B3 U0 G2

85W: B3 U0 G2

70W: B3 U0 G2

50W: B3 U0 G1


Other**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

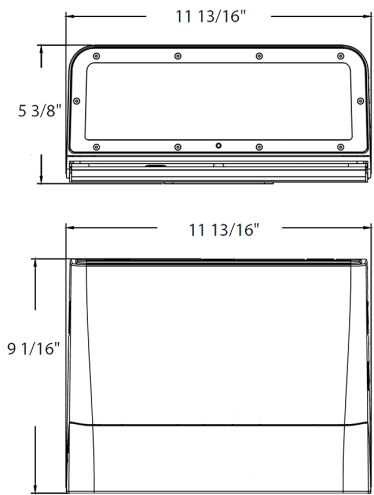

Features

- DLC Premium listed
- 0-10V dimming standard
- 100,000-hour LED Life
- 5-Year, limited warranty

Ordering Matrix

| Family | | Housing Size | | Wattage | Color Temp | Finish | Forward Throw | Driver | Options |
|--------|---|--------------------------------------|---|--|---|-----------------------------|--|---|---|
| SLIM22 | - | M | - | 100 | | | | | |
| | | S = Small M = Medium L = Large | | 30 = 30/25/20/15W 60 = 60/50/40/30W 100 = 100/85/70/50W 150 = 150/125/100/75W | Blank = 3000/4000/5000K CCT Adjustable | Blank = Bronze W = White | Blank = Adjustable Throw 0°/15°/30°/45° | Blank = 120-277V, 0-10V /480 = 480V, 0-10V Dimming | Blank = Selectable Photocell /E = Selectable Photocell w/Battery Backup |