



Color: Brass

Weight: 5.7 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant
120V	0.24A/0.15A/0.11A
208V	0.13A/0.09A/0.07A
240V	0.11A/0.08A/0.06A
277V	0.10A/0.07A/0.05A
Input Watts	29.2 /21.5 /14.3 W

LED Info

Watts	26/18/12W
Color Temp	Amber
Color Accuracy	N/A
L70 Lifespan	100,000 Hours
Lumens	1,190/1,144/922 lm
Efficacy	40.8/53.2/64.5 lm/W

Technical Specifications

Field Adjustability

Field Adjustable (Wattage):

Field adjustable light output in 3 discrete steps: 26/18/12W (factory default 26W)

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

LED Characteristics

LEDs:

Long-life, high-efficiency, surface-mount LEDs

Electrical

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Photocell:

120-277V selectable photocell that can be turned on and off.

Surge Protection:

4 kV

Construction

Cold Weather Starting:

The minimum starting temperature is -40°F (-40°C)

Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

Wavelength:

585-595nm

Housing:

Aluminum

Lens:

Acrylonitrile styrene acrylate (ASA) /Acrylonitrile butadiene styrene (ABS)

Reflector:

Mirror finish on polycarbonate

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Compliance

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

ADA Compliant:

Meets ADA Requirements for wall-mounted luminaires.

IP Rating:

Ingress protection rating of IP65 for dust and water

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Optical

BUG Rating:

26W: B1 U0 G0
18W: B1 U0 G0
12W: B0 U0 G0

Installation

Mounting:

Heavy-duty mounting bracket with spring-hinged housing and "kick stand" allow for easy installations. Conduit entries on back and both sides.


Technical Specifications (continued)

Other

10-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of ten (10) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

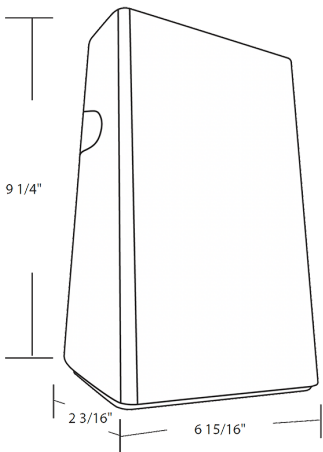

Features

- Wildlife-friendly amber light
- 100,000-hour LED Life
- 0-10V dimming, standard
- Selectable on/off photocell
- 10-Year, No-Compromise Warranty

Ordering Matrix

Family	Wattage	Wavelength	Finish	Driver
SLIM		YA	BR	
Blank = 26/18/12W YA = Amber Blank = Bronze Blank = 120-277V, 0-10V Dimming W = White BR = Solid Brass				