



<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	35W
120V	0.33A	Color Temp	Field Adjustable
208V	0.21A	Color Accuracy	2700K/3000K/3500K/4000K/5000K
240V	0.18A	L70 Lifespan	90 CRI
277V	0.16A	Lumens	50,000 Hours
Input Watts	35W	Efficacy	2,600-2,830 lm
			74-81 lm/W

**Technical Specifications**

**Performance**

**Description:**

This surface linear downlight offers a sleek, modern look for any application. Offered in various unique form factors, 5 color temperatures to choose from, universal voltage (120-277V) and dimming options available.

**Product Type:**

Surface & Flush Mounts

**Input Wattage:**

35W

**Efficacy:**

- 5000K: 81lm/W
- 4000K: 81lm/W
- 3500K: 79lm/W
- 3000K: 76lm/W
- 2700K: 74lm/W

**L70 Lifespan:**

50,000-Hour LED lifespan based on IES LM-70 results

**Dimming:**

Yes, See Dimmer Compatibility List

**Wattage Equivalency:**

Equivalent to 70W CFL

**Compliance**

**UL Listed:**

Suitable for damp locations

**Energy Star Approved:**

ENERGY STAR® Version 2.2 Certified

**Energy Star ID:**

2396880

**Trade Agreements Act Compliant:**

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

**Electrical**

**THD:**

≤30%

**Power Factor:**

≥0.9

**Operating Frequency:**

50/60Hz

**Construction**

**Material:**

Metal

**Trim Style:**

Smooth Trim

**Mounting:**

Surface mount

**Operating Temperature Range:**

-20°C - 40°C (-4°F - 104°F)

**Other**


**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Dimensions**

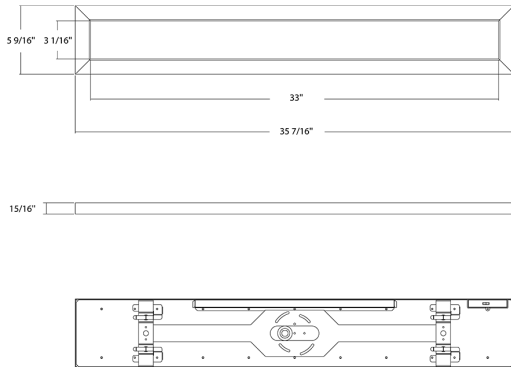

**Features**

- Select from 5 field-adjustable color temperatures 2700K, 3000K, 3500K, 4000K, or 5000K
- Suitable for indoor applications in dry and damp environments
- Dimmable, see Dimmer Compatibility List
- Meets California Title 24 requirements
- 50,000 life hours
- 5-Year, no compromise warranty

**Ordering Matrix**

Family	Size	CRI/Color Temp	Finish	Voltage/Dimming
SML	3			

2 = 2 ft, 25W    **Blank** = 90 CRI, CCT Adjustable    **Blank** = White    **Blank** = 120-277V, TRIAC  
 3 = 3 ft, 35W  
 4 = 4 ft, 45W