
SPIR-S



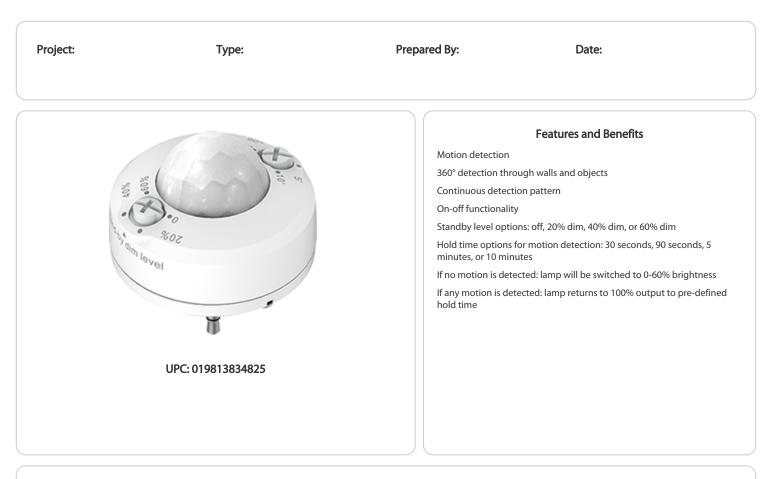

Technical Specifications

Performance

Product Type: PIR Sensor

L70 Lifespan: 50,000 Hours

Electrical

Input Voltage: 15VDC

Max Input Current: 0.1A

Max Output Current: 0.02A

Detection Angle: 120 degrees

Max Mounting Height: 19.7 ft

Detection Radius: 13.12 ft **Standby Dim Levels:** 0/20%/40%/60%

Input Frequency: 5.8 GHz +/- 75MHz

Output Voltage: 10VDC

Operating Frequency: 5.8GHz

Operating Current: 20mA

Transmit Power: 1mW

Compliance California Energy Commission (CEC) Status: Lawful for Sales in California

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty</u>.

Need help? Tech help line: (888) 722-1000 Email: sales@rablighting.com Website: www.rablighting.com Copyright © 2023 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

RAB

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	100	9.8	9.8	9
PALLET	10000	49.2	40	47.3

