



## Technical Specifications (continued)

### Green Technology:

Mercury and UV free. RoHS-compliant components.

### Other

#### 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Accessories:

**STRP BPLATE** - Bracket plate for mechanically joining fixtures, for runs need one less than fixture quantity. [Click here.](#)


**STRP SHOOK** - Suspension "S" hook and 9 1/2" chain. Sold in pairs, need 1 pair for each fixture. [Click here.](#)

**JBSTRP** - White flat cover for junction-box installations, sold individually. [Click here.](#)

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

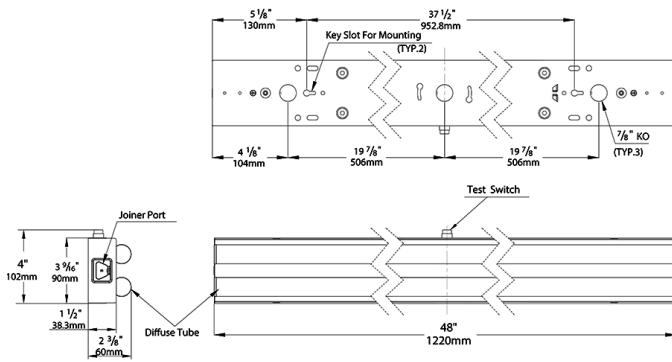

## Features

- Traditional, fluorescent tube look; energy-saving LED technology
- Surface-mount ready; accessories available for junction box or suspended mount
- 0-10V dimming
- 50,000-Hour LED lifespan

## Ordering Matrix

Family	Length/Wattage		CRI/Color Temp	Voltage	Options
STRP	440	-	835	U	/E2
<b>210</b> = Single tube 2 ft, 10W <b>220</b> = Double tube 2 ft, 20W <b>420</b> = Single tube 4 ft, 20W <b>440</b> = Double tube 4 ft, 40W			<b>850</b> = 5000K Cool, 80 CRI <b>840</b> = 4000K Neutral, 80 CRI <b>835</b> = 3500K Warm Neutral, 80 CRI	<b>U</b> = 120-277V	<b>Blank</b> = No Option <b>/MVS</b> = Microwave Occupancy Sensor Bi-Level Motion Sensor *Available only to STRP440 <sup>1</sup> <b>/E2</b> = Emergency Backup *Available only to STRP440 <sup>1</sup>

<sup>1</sup> Available with the STRP440 only