



## Technical Specifications (continued)

### Performance

#### Lifespan:

60,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Wattage Equivalency:

Equivalent to (3) F17T8

### Other


#### 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

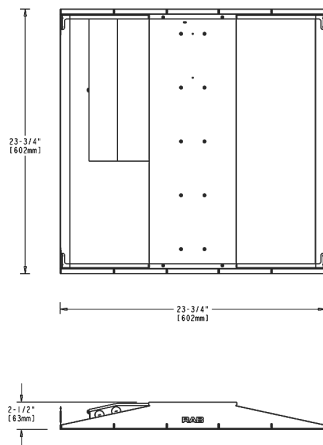

## Features

- Optional surface and recessed mount kits available
- Optional programmable occupancy sensor for multi-level lighting control
- 0-10V dimming, standard on all models
- 60,000-hour LED lifespan
- 5-Year, limited warranty

Ordering Matrix

Family		Size		Wattage	Color Temp	Options
SWISH34	-	2X2	-	29	N	/E2

2X2 = 2' x 2'  
2X4 = 2' x 4'

19 = 19W (2' x 2')  
29 = 29W (2' x 2', 2' x 4')  
39 = 39W (2' x 4')

N = 4000K Neutral  
YN = 3500K Warm Neutral

Blank = No Option  
/E2 = Battery Backup  
/LC = Lightcloud® Controller  
/LCS = Lightcloud® Sensor  
/LCB = Lightcloud® Blue Enabled  
/LCBS = Lightcloud® Blue Enabled w/ PIR Sensor  
/LCBS/MVS = Lightcloud® Blue Enabled w/ MVS Sensor  
/PIR = Passive Infrared Occupancy Sensor  
/LC/E2 = Lightcloud® Controller w/ Battery Backup  
/LCS/E2 = Lightcloud® Sensor w/ Battery Backup  
/LCB/E2 = Lightcloud® Blue Enabled and Battery Backup  
/LCBS/E2 = Lightcloud® Blue Enabled w/ PIR Sensor and Battery Backup  
/LCBS/MVS/E2 = Lightcloud® Blue Enabled w/ MVS Sensor and Battery Backup  
/PIR/E2 = Passive Infrared Occupancy Sensor w/ Battery Backup