


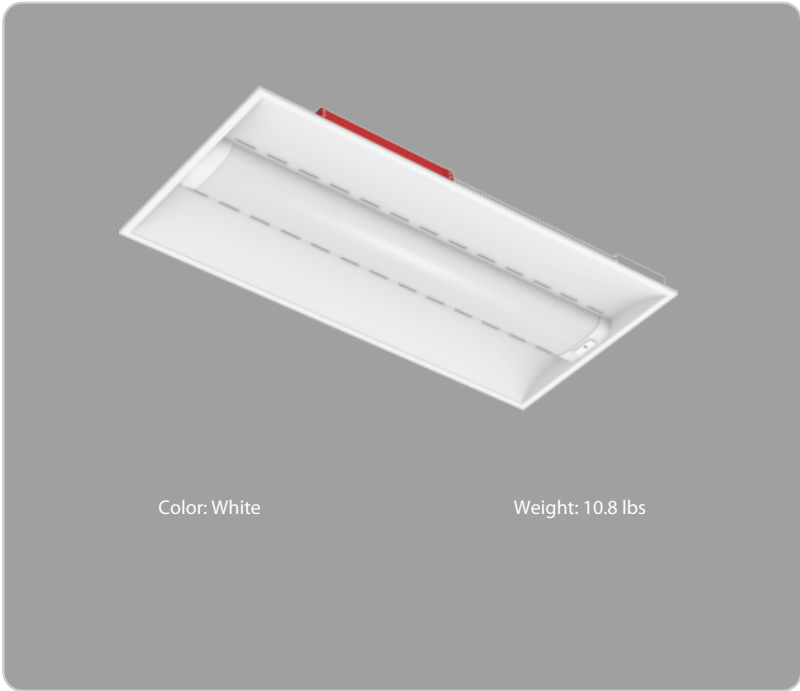

Color: White

Weight: 10.8 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	44/35/26W
120V	0.35A/0.28A/0.21A	Color Temp	3500K/4000K/5000K
208V	0.21A/0.16A/0.12A	Color Accuracy	82-83 CRI
240V	0.18A/0.14A/0.11A	L70 Lifespan	100,000 Hours
277V	0.15A/0.13A/0.10A	Lumens	3681-6047 lm
Input Watts	24.9-42.5W	Efficacy	137.8-150.8 lm/W

Technical Specifications

Lightcloud

Lightcloud Blue Controller:
MVS-IN2/LCB

Lightcloud Blue:

Lightcloud Blue is a Bluetooth Mesh wireless lighting control system that allows you to control RAB's various compatible devices. With RAB's patented Rapid Provisioning technology, devices can be quickly and easily commissioned for residential and large commercial applications using the Lightcloud Blue mobile app. Each device in a system can communicate with any other device, eliminating the need for a Gateway or Hub and maximizing the control system's reach.

DLC system - N1XMLOEATBA (Interior);
NHCZ2BIA17L (Exterior)

Learn more at
www.rablighting.com/feature/new-lightcloud-blue.

Gateway Required:
No

Communication Protocol:
Bluetooth Mesh

Range:

Indoor: Up to 60 feet between standard building materials. Building materials such as brick, concrete, and steel construction may require additional Lightcloud Blue devices to extend around an obstruction; Up to 200 feet clear line of sight.

Outdoor: Up to 60 feet clear line of sight; Up to 18 feet around corners.

Spacing Criteria:

Lightcloud Blue devices should be placed within the specified range to communicate within the Bluetooth Mesh network.

Sensor Settings

Sensor Connection Type:
Integrated

Max Mounting Height:
20 ft

Detection Range:
26 ft diameter at 20 ft mounting height

Sensor Technology:
Microwave (MVS)

Default Setting:

Uncommissioned State:
Motion Sensitivity: High
Brightness when triggered : 100%
Hold time: 20 minute
Standby to dim: 20%
Standby time: 1 minute
When vacant: Off

Commissioned State:
Once pair, the sensor will default to disabled. Once enabled the following settings apply:
Motion Sensitivity: High
Brightness when triggered: Last on status
Hold time: 20 minute
Standby to dim: 20%
Standby time: 1 minute
When vacant: Off

Adjustable Sensor Settings?:
Yes, using the Lightcloud Blue mobile app

Sensing Type:
Occupancy, Vacancy

Occupied Actions:
On or On at a Dim Level

Vacant Actions:
Off or On at a Dim Level

Technical Specifications (continued)

Occupancy Timeout:

1 minute to 240 minutes

Daylight Sensing:

Dim levels will continuously adjust based on the daylight threshold level set in the Lightcloud Blue mobile app.

Detection Angle:

About 30 to 150 degrees

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:

44/35/26W (factory default 44W)

Color Temperature Adjustable:

3500K, 4000K and 5000K (factory default 4000K)

Compliance

UL Listed:

Suitable for dry and damp locations.

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA lm-79 and lm-80.

IP Rating:

IP20

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-1Y204R

Electrical

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Surge Protection:

2 kV L-L, 2 kV L/N-G

Battery Backup:

Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V-277V.

Construction

Cold Weather Starting:

Minimum starting temperature is 5°C (41°F)

Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

Lens:

Diffused Polymethyl Methacrylate (PMMA)

Housing:

Cold Rolled Carbon Steel Sheets and Strip (SPCC)

Size:

2'x4'

Finish:

Formulated for high durability and long-lasting color

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Performance

Lifespan:


100,000-Hour LED lifespan based on IES lm-80 results and TM-21 calculations

Other

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

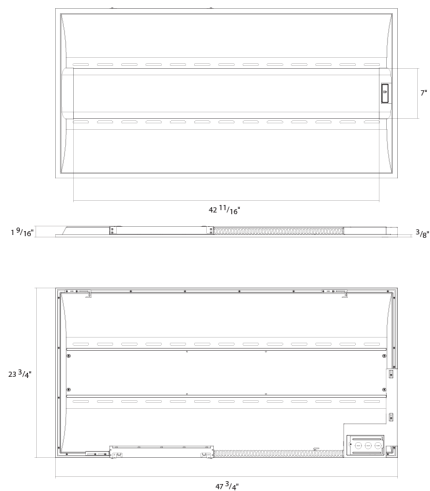

Features

- 100,000-Hour LED lifespan
- DLC Premium Listed
- 5-Year, limited warranty

Ordering Matrix

Family	Size/Wattage	Color Temp	Driver	Controls	Battery Backup
SWISHAIR	2X4			/LCBS/MVS	/E
	2X2 = 2' x 2', 35/26/18W 1X4 = 1' x 4', 35/26/18W 2X4 = 2' x 4', 44/35/26W	Blank = 3500/4000/5000K	Blank = 120-277V, 0-10V Dimming	Blank = None /PIR = Passive Infrared Occupancy Sensor /MVS = Microwave Occupancy Sensor /LCBS = Lightcloud Blue w/PIR Sensor /LCBS/MVS = Lightcloud Blue w/MVS Sensor	Blank = None /E = Battery Backup