



Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	50W
120V	0.42A	Color Temp	3500K (Warm Neutral)
208V	0.24A	Color Accuracy	81 CRI
240V	0.21A	L70 Lifespan	50,000 Hours
277V	0.18A	Lumens	5,666 lm
Input Watts	48.8W	Efficacy	116.3

Technical Specifications

Lightcloud

Lightcloud Controller Installed:

Integrated/embedded networked lighting control, luminaire-level lighting control. Fixture, Zone, and plug-load control from one powerful device. LLLC - capable of switching, 0-10V dimming, power/energy monitoring. Can also be used to extend the range of the Lightcloud mesh network communication protocols. Offers the capability to set the maximum light output to a less-than-maximum state of an individual luminaire at the time of installation or commissioning. The High-End trim functionality is field reconfigurable via the Lightcloud mesh network communication protocols. The Lightcloud controller can be attached to the fixture, junction box, or electrical panel.

DLC system - N1XMLOEATBA

[Learn more about Lightcloud.](#)

Compliance

UL Listed:

Suitable for damp locations

CECA Compliant:

Luminaire Requirements used in Environmental Air Space per the electrical code specification of the City of Chicago

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: S-486GVL

Construction

IC Rated:

Suitable for direct contact with insulation

Operating Temperature:

-20°C (-4°F) to 40°C (104°F)

Lens:

Frosted polystyrene

Housing:

Plastic frame & galvanized steel back housing

Finish:

White

Mounting:

Recessed into T-grid ceiling. Surface and recessed mounting kits available for drywall ceilings.

Green Technology:

Mercury and UV free. RoHS-compliant components.

LED Characteristics

LEDs:

Long-life, high-efficiency, surface-mount LEDs

Performance

Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Electrical

Driver:

Constant Current, Class 2, 120-277V, 50/60 Hz, 2kV surge protection, 120V: 0.42A, 208V: 0.24A, 240V: 0.21A, 277V: 0.18A

THD:

11.13% at 120V, 5.8% at 277V

Power Factor:

99.1% at 120V, 98.5% at 277V

Dimming:

0-10V, standard down to 10%

Technical Specifications (continued)

Other

Note:

All values are typical (tolerance +/- 10%)


5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

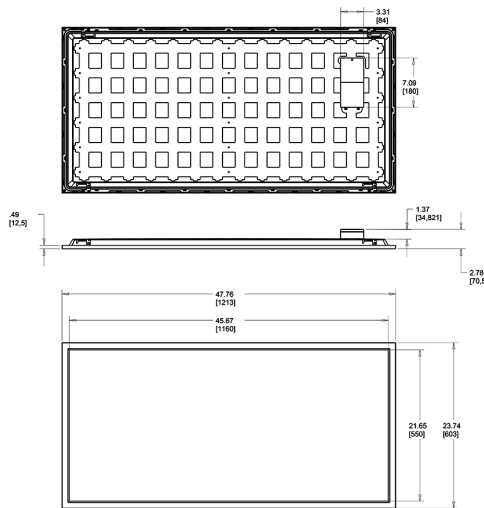

Features

- Integrated 0-10V dimming
- 50,000-Hour LED lifespan
- 5-Year, limited warranty

Ordering Matrix

Family	Housing Size	Wattage	Color Temp	Voltage	Lightcloud
T34	2X4	50	YN	/D10	/LC
	2X2 = 2' X 2' 2X4 = 2' X 4'	20 = 20W ¹ 30 = 30W 40 = 40W 50 = 50W ²	Blank = 5000K N = 4000K YN = 3500K	/D10 = 0-10V Dimming	Blank = No Options /LC = Lightcloud Controller

Must order in case quantity increments. See product spec sheet for exact increments.

¹ Available only in 2' x 2' only.

² Available in 2' x 4' only.