


Project:	Type:	Prepared By:	Date:
-----------------	--------------	---------------------	--------------

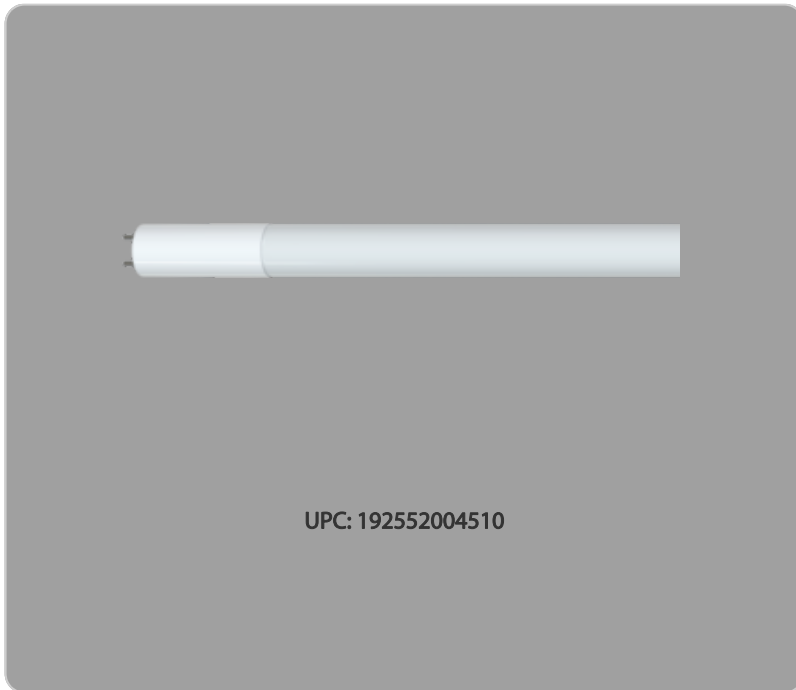

Features and Benefits

- Direct Replacement for Fluorescent Lamps: F32T8/32W, F32T8/30W, F32T8/28W, F32T8/25W
- Easy to install plug and play that requires no rewiring, no tools, no instructions
- 50,000 hour Lifespan
- Rated for use in enclosed and open fixtures in dry or damp locations
- Diffused frosted lens will maintain the same light quality over time
- Compatible with most instant start electronic T8 ballasts, see Ballast Compatibility List
- Approximately 40% more efficient than fluorescent T8 lamps
- Instant on full brightness
- Environmentally friendly, no mercury used
- NSF Listed: NSF/ANSI Standard 2 - Food Equipment - Splash Zone (Not for Direct Food Zone without additional fixture considerations)
- Dimmable, see Dimmer Compatibility List

Technical Specifications	
Performance <hr/> Product Type: Linear Input Wattage: 10W Lumens: 1,450lm Efficacy: 145lm/W L70 Lifespan: 50,000-Hour LED lifespan based on IES LM-70 results	Bulb Shape: T8 Nominal Length: 3 ft Installation <hr/> Base Type: G13 Optical <hr/> Beam Angle: 210° Electrical <hr/> Operating Temperature: -20°C to 45°C (-4°F to 113°F)
LED Characteristics <hr/> Color Accuracy (CRI): 82 CRI Color Temperature: 4000K Construction <hr/> Material: Glass	<hr/> Compliance <hr/> UL Listed: Suitable for damp locations Certification Model Number: T10275(T8-10-36G-840-DIR USA)

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	0	37.13	6.3	6
PALLET	1	49	36	48.03

Dimension

