

Project:	Type:	Prepared By:	Date:
-----------------	--------------	---------------------	--------------



Features and Benefits

Replacement for conventional fluorescent T8 and T12 linear tubes

Integral Driver enables lamp to be wired directly to line voltage without need for an external driver or ballast

Single ended and double ended wiring method

Works with non-shunted sockets and shunted sockets.

Approximately 50% more energy efficient when compared to Fluorescent T8 lamps

50,000 hour Lifespan.

Rated for use in enclosed and open fixtures in dry or damp locations

Diffused frosted lens will maintain the same light quality over time

Instant on full brightness

Environmentally friendly, no mercury used

NSF Listed: NSF/ANSI Standard 2 - Food Equipment - Splash Zone (Not for Direct Food Zone without additional fixture considerations)

Internal thermal fuse for added safety

Technical Specifications		
Performance	Nominal Length:	Dimming:
Product Type: Linear	4 ft	No
Input Wattage: 10.5W	Finish: Frosted	Input Voltage: 120-277V AC
Lumens (Nominal): 1,700lm	Base Type: G13	Operating Frequency: 50/60Hz
Efficacy: 160lm/W	For Use Outdoors in Open Fixtures: No	Input Current @ 120V: 106mA
L70 Lifespan: 50,000 Hours	LED Characteristics	Input Current @ 277V: 44mA
Wattage Equivalency: 25W/28W/30W/32W Fluorescent	Color Temperature: 3500K Neutral White	Other
Construction	Color Accuracy (CRI): 82 CRI	Warranty: RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty .
Material: Glass	Electrical	
Bulb Shape: T8	Power Factor: >0.9	
	Operating Temperature: -20°C to 45°C (-4°F to 113°F)	

Technical Specifications (continued)

Installation

Installation Type:

Type B, Single or Double Ended wiring

Compliance

UL Recognized:

Yes

UL Classified:

Yes

NSF Listed:

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.

Model Number for Certification:

T10046

California Energy Commission (CEC) Status:

Lawful for Sales in California

Application:

Suitable for damp locations and totally enclosed fixtures.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PLO4YVNCRS34

Optical

Beam Angle:

210°


Minimum Compartment Size

Length x Width x Height [in]	Lamp Quantity
48	4


Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	25	48.8	5.9	6
PALLET	1200	47.2	40	51.3

Wiring Diagram

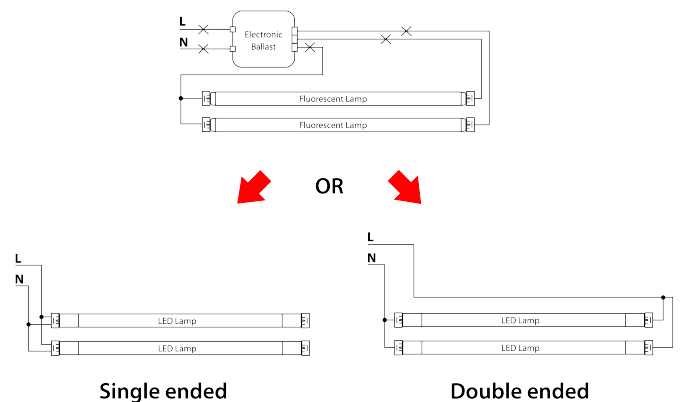

Dimension



Light Distribution

