
## T8-9-24G-840-SD-BYP USA

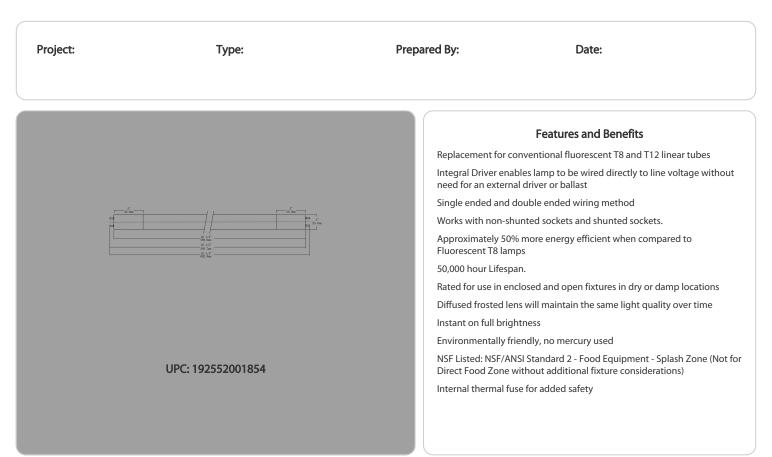

### **Technical Specifications**

Performance Product Type: Linear

Input Wattage: 9W

Lumens: 1,150lm

Efficacy: 127.8lm/W

L70 Lifespan: 50,000-Hour LED lifespan based on IES LM-70 results

LED Characteristics Color Accuracy (CRI): 82 CRI

Color Temperature: 4000K

#### Construction

Material: Glass Bulb Shape: T8

Nominal Length: 2 ft

Installation Base Type: G13

## Optical

Beam Angle: 210°

Electrical Power Factor: >0.9

Input Voltage: 120-277V

**Operating Temperature:** -20°C to 45°C (-4°F to 113°F)

Compliance Enclosed Fixtures: Suitable for use in enclosed fixtures **UL Listed:** Suitable for damp locations

UL Recognized: Yes

UL Classified: Yes

#### NSF Listed:

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.

Certification Model Number:

T10263(T8-9-24G-840-SD-BYP USA)

#### Other

Need help? Tech help line: (888) 722-1000 Email: sales@rablighting.com Website: www.rablighting.com Copyright © 2024 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

# T8-9-24G-840-SD-BYP USA

## **Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	0	25.12	6.3	6
PALLET	2	49	36	48.03

