

Project: Type: Prepared By: Date:



UPC: 019813908441

#### **Features and Benefits**

Impact resistant, can handle demanding construction site environments

Omni-directional light distribution

Lightweight design with high output

US Cord and Plug

IP64 Water and Dust resistant

6kV surge protection built in

50,000 hour Lifespan

120V

5 Year No Compromise Warranty

# **Technical Specifications**

Performance

**Product Type:** 

LED temporary High Bay

Input Wattage:

100W

Lumens (Nominal):

12,000lm

Efficacy:

110lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results

and TM-21 calculations

Wattage Equivalency:

400W

**LED Characteristics** 

Color Accuracy (CRI):

80

**Color Temperature:** 

5000K

Construction

**Bulb Shape:** 

Temporary Work Light

**Enclosure Material:** 

Polycarbonate

**Housing Finish:** 

Construction Orange

Base Type:

US Plug, 6FT cord

Weight:

3.66 lbs

Optical

Beam Angle:

360°

**Electrical** 

THD:

<20%

**Power Factor:** 

>0.9

Input Voltage:

120V

**Operating Frequency:** 

60 Hz

**Operating Temperature:** 

-30°C to 60°C

**Surge Protection:** 

6kV

Installation

**Installation Method:** 

US Cord and Plug, linkable up to 6 units

Other

Technology EQ:

Metal Halide or High Pressure Sodium



# **Technical Specifications (continued)**

### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

# Compliance

## Listings:

**UL** Listed

#### **Environment/Fixture Rating:**

Damp / Open

#### IP Rating:

IP64

#### RoHS:

Mercury and UV free. RoHS-compliant components.

#### FCC:


Complies with Part 15B of the FCC Rules

#### **Model Number for Certification:**

H10041(TEMP-100-850)

## **Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	4	0	0	0
PALLET	72	0	0	0

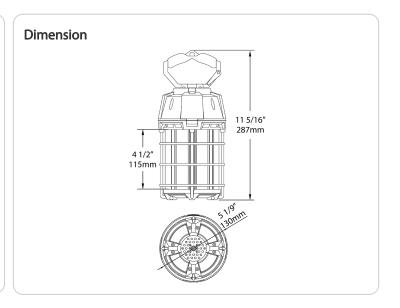

# TEMP-100-850



