


<b>Project:</b>	<b>Type:</b>	<b>Prepared By:</b>	<b>Date:</b>
-----------------	--------------	---------------------	--------------

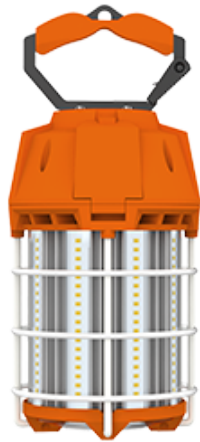

UPC: 192552005289

### Features and Benefits

- Impact resistant, can handle demanding construction site environments
- Omni-directional light distribution
- Lightweight design with high output
- US Cord and Plug
- IP64 Water and Dust resistant
- 6kV surge protection built in
- 50,000 hour Lifespan
- 120V
- 5 Year No Compromise Warranty

## Technical Specifications

### Performance

**Product Type:**  
LED temporary High Bay

**Input Wattage:**  
100W

**Lumens (Nominal):**  
12,000lm

**Efficacy:**  
120lm/W

**L70 Lifespan:**  
50,000-Hour LED lifespan based on IES LM-70 results

### Compliance

**UL Listed:**  
Suitable for damp locations

**Enclosed Fixtures:**  
Suitable for use in enclosed fixtures

### LED Characteristics

**Color Temperature:**  
5000K

**Color Accuracy (CRI):**  
>80 CRI

### Electrical

**THD:**  
<20%

**Power Factor:**  
>0.9

**Dimmable:**  
Yes

**Flicker:**  
<30%

**Operating Temperature:**  
-30°C to 60°C

**Input Voltage:**  
120V

**Operating Frequency:**  
60 Hz

### Construction

**Bulb Shape:**  
Work light

**Base Type:**  
Plug

**Endcap Material:**  
Metal

**Enclosure Material:**  
Polycarbonate

### Optical

**Beam Angle:**  
360°

### Installation

**Installation Orientation:**  
Vertical

## Technical Specifications (continued)

### Other


#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	4	19.7	13.2	20
PALLET	21	48	40.16	42.91

## Dimension

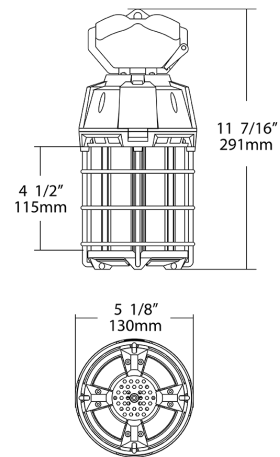

## Light Distribution

