

Weight: 4.4 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	130W
120V	1.03A	Color Temp	5000K
208V	0.62A	Color Accuracy	80 CRI
240V	0.55A	L70 Lifespan	50,000 Hours
277V	0.49A	Lumens	15,304 lm
Input Watts	130W	Efficacy	121.82

Technical Specifications

Performance

Product Type:

UFO High Bay Temp Light

Description :

Highbay temporary construction lighting that is linkable, high output and versatile enough for any construction project

Wattage Equivalency:

400W Metal Halide

Input Wattage:

130W

Lumens:

15,304lm

Efficacy:

121.82lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Electrical

Driver:

Constant Current Class 1 Driver

THD:

≤25%

Power Factor:

≥0.9

Dimmable:

No

Input Voltage:

120-277V

Operating Frequency:

50/60Hz

Input Current @ 120V (mA):

1030mA

Input Current @ 208V (mA):

620mA

Input Current @ 240V (mA):

550mA

Input Current @ 277V (mA):

490mA

Operating Temperature:

-20°F to 113°F (-30°C to 45°C)

Flicker:

≤30%

Surge Protection:

4 kV

LED Characteristics

Beam Angle:

180°

Color Temperature:

5000K

Color Accuracy (CRI):

>80 CRI

Color Consistency:

<7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Installation

Hardware:

Comes with 1 ft 120V plug with M15 waterproof Connector, or 1Ft hard wire cable

Mounting:

Comes with caribinear hook for simple mounting

Plug:

18/3 AWG SJOW Cable with M15 waterproof connector

Male port with 6 ft of cable

Female port with .39 ft of cable

Technical Specifications (continued)

Linkable:

120V - 6 pcs, Max 640W
277V - 14 pcs, Max 1260W

Construction

Housing Finish:

Construction Orange

Lens:

Clear impact resistant Polycarbonate lens

Housing:

Die-cast aluminum housing with integrated waterproof on/off switch

Compliance

Listings:

UL1598

Environment:

Suitable for use indoors and outdoors in dry, damp, or wet environments.

California Energy Commission (CEC) Status:

Lawful for Sales in California

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15 of the FCC Rules

Trade Agreements Act Compliant:


This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Other

3-Year Limited Warranty:

The RAB 3-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

Dimensions

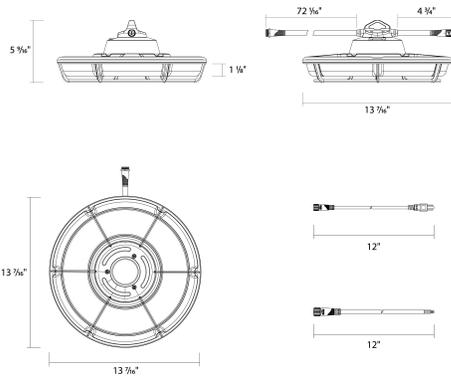

Features

- Temporary UFO Highbay great for industrial applications
- Over 15,000 lumens and super bright 5000K CCT
- Robust die-cast aluminum construction with clear polycarbonate lens
- Linkable SJOW cord with water tight quick connectors to daisy chain fixtures
- 120-277V Driver, 4kV Surge protection, and IP65 Rated
- Comes with 120V NEMA 5-15 Plug and Hard Wire cable in box
- 120-277V NEMA Plug and 25FT Extension cable sold separately

Ordering Matrix

Family	Wattage	CRI/Color Temp	Voltage	Finish
TEMPBAY	130			
	130 = 130W, (15,600lm)	Blank = 80 CRI, 5000K	Blank = 120-277V	Blank = Orange