



Weight: 2.6 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Voltage
120V	1.2A
208V	N/A
240V	N/A
277V	N/A
Input Watts	N/A

LED Info

Watts	N/A
Color Temp	N/A
Color Accuracy	N/A
L70 Lifespan	50,000 Hours
Lumens	N/A
Efficacy	N/A

Technical Specifications

Performance

Product Type:

LED Tape Light Driver Wet Rated

Description:

Veristale driver with high-performance dimming on ELV, TRIAC and 0-10V dimming system that allows for dims to dark. Outdoor Rated.

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Electrical

Driver:

Constant Voltage @ 100-277V, 47-63Hz:

Power Factor:

0.95

Dimmable:

Can be used with TRIAC, ELV, or 0-10V Dimmers

Input Voltage:

100-277V

Output Power:

96W Max

Output Voltage:

24VDC

Output Current:

4A

Operating Frequency:

47-63Hz

Operating Temperature:

-4°F to 113°F (-20°C to 45°C)

Compliance

Listings:

UL Listed

Environment:

Suitable for use indoors and outdoors in dry, damp, or wet environments.

IP Rating:

IP20

California Energy Commission (CEC) Status:

Lawful for Sales in California

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

RoHS:

Mercury and UV free. RoHS-compliant components.

Environment Rating:

IP65

FCC:


Complies with Part 15 of the FCC Rules

Other

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

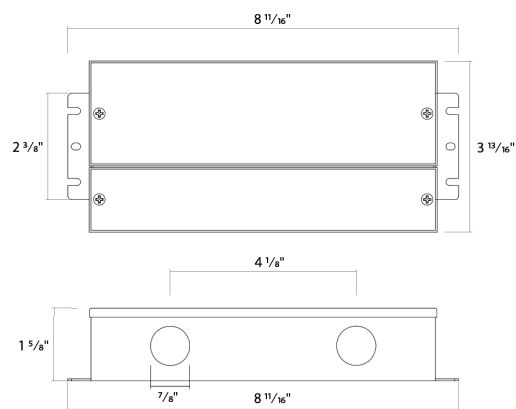

Features

- 120-277V Universal Input voltage
- TRIAC, ELV, and 0-10V Dimming
- 0.1% Performance Dimming, dim to dark
- Outdoor Rated
- UL Listed and Title 24 JA8 Compliant
- 5-year warranty

Ordering Matrix

Family	Power	Input Voltage	Output Voltage	Rating	Dimming
TOD	96				
96 = 96W Blank = 100-277V Blank = 24 DC Blank = Outdoor Rating Blank = 0-10V or TRIAC/ELV Dimming					