

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	72W
120V	0.60A	Color Temp	3000K/3500K/4000K/5000K
208V	0.35A	Color Accuracy	84 CRI
240V	0.30A	L70 Lifespan	100,000 Hours
277V	0.26A	Lumens	5736-12028 lm
Input Watts	46.1-94.2W	Efficacy	122.8-127.7 lm/W

**Technical Specifications**

**Compliance**

**UL Listed:**

Suitable for damp locations

**DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: S-NOVM87

**Electrical**

**Driver:**

48W: Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.40A, 208V: 0.23A, 240V: 0.20A, 277V: 0.18A  
72W: Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.60A, 208V: 0.35A, 240V: 0.30A, 277V: 0.26A  
96W: Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.80A, 208V: 0.47A, 240V: 0.40A, 277V: 0.35A

**Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 5%.

**THD:**

5.6% at 120V, 11.7% at 277V

**Power Factor:**

99.7% at 120V, 96.9% at 277V

**Surge Protection:**

1-2kV

**Performance**

**Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Wattage Equivalency:**

48W: Replaces up to (2) F32T8 or (1) F96T8  
72W: Replaces up to (4) F32T8 or (2) F96T8  
96W: Replaces (5) F32T8 or (2) F96T8

**LED Characteristics**

**LEDs:**

Long-life, high-efficiency, surface-mount LEDs

**Color Consistency:**

4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Construction**

**Cold Weather Starting:**

The minimum starting temperature is -20°C (-4°F)

**Maximum Ambient Temperature:**

Suitable for use in up to 55°C (131°F)

**Housing:**

Cold Rolled Carbon Steel Sheets and Strip (SPCC)

**Lens:**

Diffused Polymethyl Methacrylate (PMMA)

**Mounting:**

Comes standard with two mounting accessories: aircraft cable for secure, suspended mounts and a stainless bracket for easy mounting to junction boxes.

**Finish:**

Formulated for high durability and long-lasting color

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

## Technical Specifications (continued)

### Lightcloud

#### Lightcloud Controller Installed:

Integrated/embedded networked lighting control, luminaire-level lighting control. Fixture, Zone, and plug-load control from one powerful device. LLLC - capable of switching, 0-10V dimming, power/energy monitoring. Can also be used to extend the range of the Lightcloud mesh network communication protocols. Offers the capability to set the maximum light output to a less-than-maximum state of an individual luminaire at the time of installation or commissioning. The High-End trim functionality is field reconfigurable via the Lightcloud mesh network communication protocols. The Lightcloud controller can be attached to the fixture, junction box, or electrical panel.

DLC system - N1XMLOEATBA

[Learn more about Lightcloud.](#)

### Other

#### Lighting Pattern:

70% downlight, 30% uplight

#### Accessories:

Fixture to fixture connector: [TOMO CONNECT](#)


#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

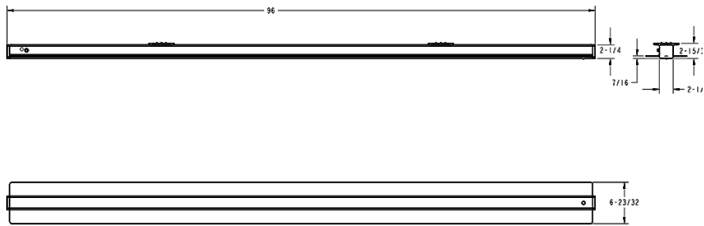

## Features

- 0-10V dimming
- 100,000-Hour LED lifespan
- 5-Year, No-Compromise Warranty

## Ordering Matrix

Family	Length (Wattages)	Color Temp	Finish	Voltage	Options
TOMO	-	8			/LC
	2 = 2' (24W/18W/12W) 4 = 4' (48W/36W/24W) 8 = 8' (96W/72W/48W)	Blank = 3000K/3500K/4000K/5000K	Blank = White	Blank = 0-10V Dimming, 120-277V	Blank = No Option /LC = Lightcloud® Control /LCB = Lightcloud® Blue Enabled /LCBS = Lightcloud® Blue Enabled w/PIR Sensor /PIR = Passive Infrared Occupancy Sensor /E = Battery Backup <sup>1</sup> /LC/E = Lightcloud® Control w/Battery Backup <sup>1</sup> /LCB/E = Lightcloud® Blue Enabled w/Battery Backup /LCBS/E = Lightcloud® Blue Enabled w/PIR Sensor and Battery Backup /PIR/E = Passive Infrared Sensor w/Battery Backup <sup>1</sup>

<sup>1</sup> \*Available only for 4' and 8'