



Weight: 0.9 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Voltage	Watts	2.5 W/FTW
120V	19 mA/LED	Color Temp	4000K
208V	N/A	Color Accuracy	90 CRI
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	275lm/ft lm
Input Watts	2.5 W/ftW	Efficacy	110

Technical Specifications

Performance

Product Type:

Wet Location SMD Tape Static White

Description:

FLEXTAPE are bendable, outdoor LED tapes providing energy-efficient lighting for both indoor and outdoor applications.

Input Wattage:

2.5 W/FT

Lumens:

250lm/ft±10%

Efficacy:

110lm/W±10%

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Electrical

Dimmable:

PWM Dimming Signal, dimmable down to .1% with LED Driver(sold separately)

Operating Temperature:

-4°F to 113°F (-20°C to 45°C)

LED Characteristics

Beam Angle:

120°

Color Temperature:

4000K

Color Accuracy (CRI):

90 CRI

R9 Value:

High color performance with R9 greater than 50

Color Consistency:

<5-step (2700K &5000K);<7-step (3000/3500/4000K) MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Installation

Field Cuttable Increment:

Cuttable every 2.19"

Mounting:

Easy installation to most surfaces by using pre-attached 3M® double-sided tape

Construction

Length:

32.8 ft, 10M

Light Source:

SMD LED White

Material Construction:

Weather resistant high=grade silicone cover with super flexible bending

Light Effect:

Soft linear lighting performance

Compliance

Listings:

UL Listed

Environment:

Suitable for use indoors and outdoors in dry, damp, or wet environments.

IP Rating:

Ingress protection rating of IP67 for dust and water

California Energy Commission (CEC) Status:

Lawful for Sales in California

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

Technical Specifications (continued)

FCC:  
Complies with Part 15 of the FCC Rules

Other


Field Wiring Accessories:  
TOJ2 - 2-pin outdoor connector kit  
TPF2 - 2-pin power feed kit

Mounting Accessories:  
TAP12 - 12mm wide aluminum channel kits  
TSC2 - Silicone mounting clipos

Compatible Drivers:  
TID-60 - Indoor 60W Driver  
TID-96 - Indoor 96W Driver  
TOD-96 - Outdoor 96W Driver

5-Year Limited Warranty:  
The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Dimensions

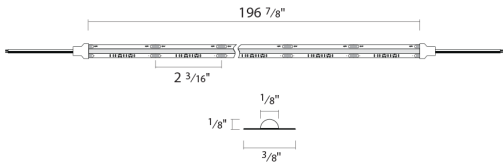

Features

- Flexible, wet location LED tape provides energy-efficient lighting for both indoor and outdoor applications.
- Field-cutable every 1.97" for shorter runs with a max run of 32ft. Can be linked with connectors (sold separately)
- Easy installation to most surfaces by using pre-attached 3M® double-sided tape
- Available in Static White 2700K, 3000K, 4000K
- 60W & 96W indoor or outdoor rated drivers available (sold separately)
- 60W & 96W indoor or outdoor rated drivers available (sold separately)

Ordering Matrix

Family	Color Temp	CRI	Input Voltage	IP Rating	Length
TOS	N				
YY = 2700K   Blank = 90 CRI   Blank = 24V DC   Blank = IP67   Blank = 32.8 ft					
Y = 3000K					
N = 4000K					