# TSLED4-36/D10

# RAB



Project:	Туре:
Prepared By:	Date:

Watts

Color Temp

L70 Lifespan

Lumens

Efficacy

Color Accuracy 86 CRI

36W

5000K (Cool)

100,000 Hours

4,702 lm

128.5 lm/W

TSLED can be ceiling or wall mounted. Offered with several optional features that are idea for stairwell applications and enable compliance with the NFPA 101: Life Safety Code<sup>®</sup> including: ultrasonic motion sensor, bi-level dimmer, emergency battery backup, Lightcloud<sup>™</sup> Controller

Color: White

/eight: 11.0 lbs

# **Technical Specifications**

# Compliance

# **UL Listed:**

Suitable for damp locations

# IESNA LM-79 &lm-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNAIm-79 andIm-80

# Electrical

#### Driver:

Constant Current, Class 2, 100-277V, 50/60 Hz., 2KV surge protection, 120V: 0.31A, 208V: 0.18A, 240V: 0.15A, 277V: 0.14A

# Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

#### THD:

8.36% at 120V6.25% at 277V

# **Power Factor:** 99.5% at 120V, 97.3% at 277V

# **LED Characteristics**

LEDs: Long-life, high-efficacy, surface-mount LEDs

# Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

Туре

120V

208V

240V

277V

# **Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

# Performance

#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Wattage Equivalency:

Equivalent to (2) F32T8

### Construction

**Maximum Ambient Temperature:** Suitable for use in up to 40°C (104°F)

# Housing:

Die-formed, 20 gauge, cold-rolled, post-painted steel (white)

# Lens:

Soft-glow acrylic lens reduces glare and has smooth and even light distribution

# Reflector:

High-reflectance white steel

#### Mounting:

**Constant Current** 

0.31A

0.18A

0.15A

0.14A

Input Watts 36.6W

Surface mount, ceiling or wall. Knockouts on sides and back.

#### Finish:

Formulated for high durability and long-lasting color

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

### Other


#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty</u>.

# **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

# TSLED4-36/D10

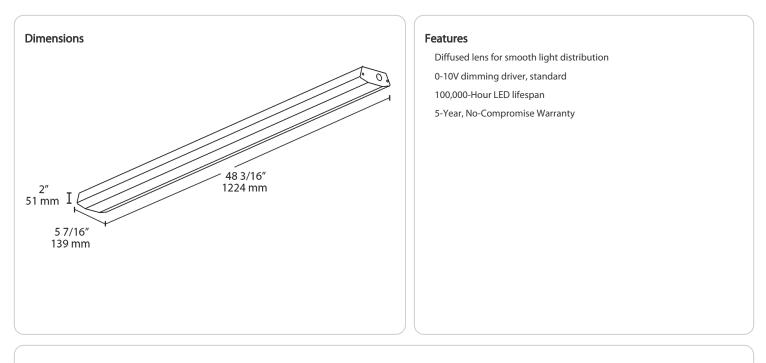

#### **Ordering Matrix** Wattage Dimming Options Family Size **Color Temp TSLED** 4 36 /D10 **4** = 4 ft 28 = 28W Blank = 5000K Cool /D10 = Dimmable Blank = No Option N = 4000K Neutral **2 =** 2 ft **36 =** 36W /LC = Lightcloud<sup>®</sup> Controller<sup>1</sup> YN = 3500K Warm Neutral /US = Ultrasonic Sensor /US/BL = Ultrasonic Sensor & Bi-Level Operation /E2 = Battery Backup /US/E2 = Ultrasonic Sensor & Battery Backup /US/BL/E2 = Ultrasonic Sensor, Bi-Level Operation & Battery Backup <sup>1</sup> Only available as a stand-alone option. May not be combined with sensor, bi-level or emergency options.