
# VAN34-60YAFFRW/MVS

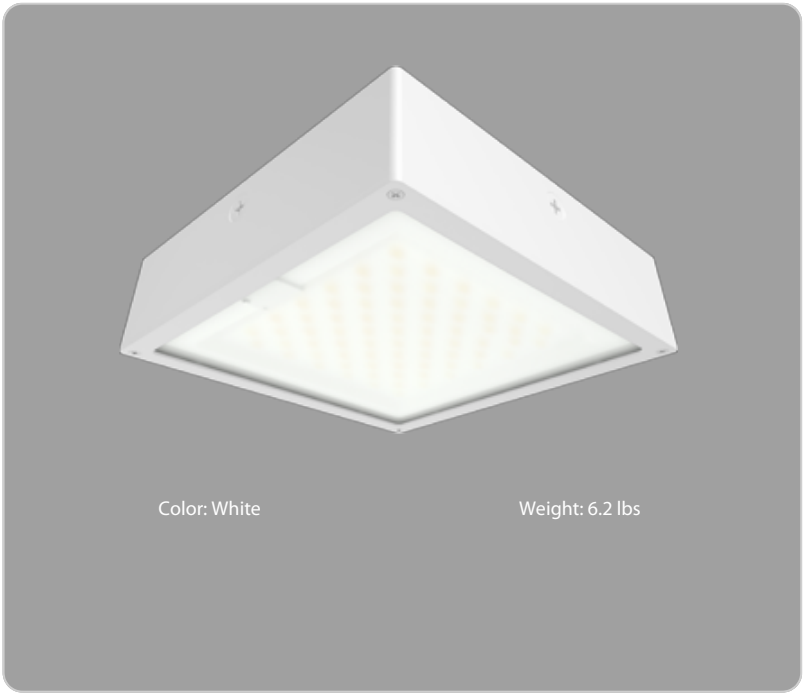

Color: White

Weight: 6.2 lbs

| | |
|---|---|
| **Project:** | **Type:** |
| **Prepared By:** | **Date:** |

### Driver Info

| | |
|---|---|
| Type | Constant Current |
| 120V | 0.46A |
| 208V | 0.27A |
| 240V | 0.23A |
| 277V | 0.21A |
| Input Watts | 55.5W |

### LED Info

| | |
|---|---|
| Watts | 60W |
| Color Temp | Amber |
| Color Accuracy | 2 CRI |
| L70 Lifespan | 100,000 Hours |
| Lumens | 1,684 lm |
| Efficacy | 30.3 |

## Technical Specifications

### Compliance

**UL Listed:**
Suitable for wet locations

**IESNA LM-79 & LM-80 Testing:**
RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**IP Rating:**
Ingress protection rating of IP65 for dust and water

### Electrical

**Driver:**
Constant Current, Class 2, 120-277V, 50/60 Hz: 60W: 120V: 0.46A, 208V: 0.27A, 240V: 0.23A, 277V: 0.22A

**Dimming Driver:**
Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

**Aux Power Supply:**
Yes

**Dim to Off:**
Yes

**Surge Protection:**
L/N: 4 kV, L/N-PE: 4 kV

**Photocell:**
Bulit-in photocell included with on/off switch

### LED Characteristics

**LEDs:**
Long-life, high-efficacy, surface-mount LEDs

**Color Uniformity:**
RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Performance

**Lifespan:**
100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

### Construction

**Cold Weather Starting:**
The minimum starting temperature is -40°F (-40°C)

**Maximum Ambient Temperature:**
Suitable for use in up to 104°F (40°C)

**Lens:**
Polycarbonate frosted flat lens

**Gaskets:**
Ethylene Propylene Diene Monomer (EPDM)

**Housing:**
Die-cast aluminum

**Reflector:**
Aluminum with high reflectance white finish

**Finish:**
Formulated for high durability and long-lasting color

**Green Technology:**
Mercury and UV free. RoHS-compliant components.


### Other

**5-Year Limited Warranty:**
The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

# VAN34-60YAFFRW/MVS

## Dimensions

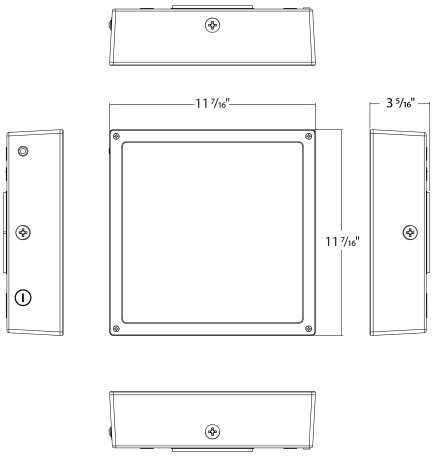


## Features

- 100,000-Hour LED lifespan
- 0-10V Dimming
- IP65 Rated
- 5-Year, limited warranty

## Ordering Matrix

| Family | Wattage | Color Temp | Lens | Finish | Driver | Controls |
|---|---|---|---|---|---|---|
| VAN34 | 60 | YA | FFR | W | | /MVS |
| | **60 =** 60W | **YA =** Amber | **Blank =** Drop Lens<br>**F =** Flat Lens<br>**FR =** Frosted Drop Lens<br>**FFR =** Frosted Flat Lens | **Blank =** Bronze<br>**W =** White | **Blank =** 120-277V, 0-10V Dimming | **Blank =** On/Off Photocell<br>**/MVS =** Microwave Sensor<br>**/LCBS/MVS =** Lightcloud Blue w/MVS Sensor |


Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice