VAN3F32MS





Sensor controlled Vandalproof fixtures. VAN 3 up to 42 Watts CFL. VAN5 up to 96 Watts CFL, VAN6 up to 26 Watts CFL @ 120v. Sensor color matched to fixture. Sensor is not vandalproof. Lamp supplied.

Color: Bronze

Weight: 7.0 lbs

Technical Specifications

Compliance

UL Listed: Suitable for wet locations

Electrical

Voltage: 120V AC 60Hz

Surge Protection:

Withstands up to 3000 volts

Manual Override:

Double flip wall switch logic prevents activation by short power outages. Resets after 8 hours. No extra wiring needed.

Sensor Specifications

Time Adjustment:

5 seconds to 15 minutes CFL lamps have longer life if Time Adjustment is set to > 7 minutes

Quick Test Time:

5 seconds test time for fast installation. Works day or night.

"No Hands" Auto Testing:

Auto mode starts after 4 minutes of testing. No adjustment needed.

Sensor Case Construction:

Precision molded Lexan

Photocontrol: Deactivates lights during daylight

Construction

Vandal Resistant Lens: Hard lens resists vandalism

Built for Severe Conditions: Double weatherproofing for long life

Min Start Temp:

0°

Ballast Minimum Starting Temperature: 0°F

LED Characteristics

LED Detection Indicator:

Glows red day and night for "on-guard" deterrence

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

	Project: Prepared By: Lamp Info		Type: Date: Ballast Info		
	Туре	32w Triple	Туре	Electronic QT	
	Watts	32W	120V	0.31A	
	Shape/Size	N/A	208V	N/A	
	Base	N/A	240V	N/A	

277V

Input Watts 32W

N/A

Hours 12,000 Lamp Lumens 2,400 lm Efficacy 75 lm/W

N/A


Efficacy 75 l

ANSI

Need help? Tech help line: **(888) 722-1000** Email: **sales@rablighting.com** Website: **www.rablighting.com** Copyright © 2023 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

VAN3F32MS



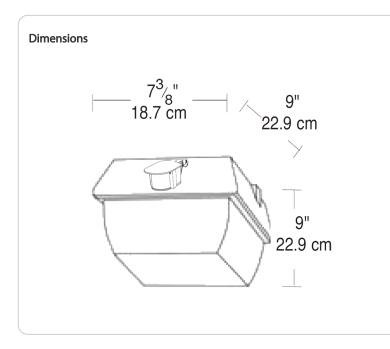

Features

Precision die cast aluminum housing with durable polyester powder coating

Cutoff and standard Wall packs

LED "on guard" indicator

Can be wired in parallel

Adjustable mini sensor with 180 detection patterned

Sensor color matches fixture

Vandal proof fixtures offer sensor controlled compact fluorescent up to 96 Watts