



Medium size ceiling mount fixture: 26, 32 and 42 Watt compact fluorescent available. Housing is die cast aluminum with clear vandalproof polycarbonate refractor. Photocontrol, Sensor (CFL 120v only) models available. Lamp supplied.

Color: Bronze

Weight: 6.8 lbs

| Project:     | Туре: |
|--------------|-------|
| Prepared By: | Date: |

| Lamp Info  | np Info    |            | Ballast Info    |  |
|------------|------------|------------|-----------------|--|
| Type       | 32w Triple | Туре       | Elec HPF QT     |  |
| Watts      | 32W        | 120V       | 0.31A           |  |
| Shape/Size | N/A        | 208V       | 0.2A            |  |
| Base       | N/A        | 240V       | 0.2A            |  |
| ANSI       | N/A        | 277V       | 0.13A           |  |
| Hours      | 12,000     | Input Watt | Input Watts 32W |  |
| Lamp Lumen | s 2,400 lm |            |                 |  |
| Efficacy   | 75 lm/W    |            |                 |  |
|            |            |            |                 |  |

# **Technical Specifications**

## Compliance

## UL Listed:

Suitable for wet locations. Covered Ceiling Mount Only. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

#### **Electrical**

#### Sockets:

Medium base 4kv Pulse Rated Glazed porcelain

### HID Quartz restrike:

Add suffix "/QR" to Van3 (50w restrike) or Van5 (100w restrike) for HOT restrike. Provides immediate illumination in case of momentary power failure.

### Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts

## Optical

# Refractor:

Injection molded polycarbonate, designed for maximum structural strength

## Construction

### Housings:

Die-cast aluminum with powder coat bronze or white finish

#### Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER).

#### Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

## **Conduit Entry:**

1/2"

### **Ballast Minimum Starting Temperature:**


0°F

### Other

### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.



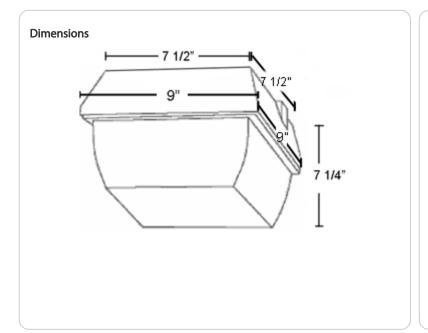

#### **Features**

Both Vandal proof Center Pin Torx and slotted Phillips head screws supplied

Tough polycarbonate refractors

Die cast aluminum housing

Quartz Restrike available, consult factory