



Medium size ceiling mount fixture: 26, 32 and 42 Watt compact fluorescent available. Housing is die cast aluminum with clear vandalproof polycarbonate refractor. Photocontrol, Sensor (CFL 120v only) models available. Lamp supplied.

Color: Bronze

Weight: 6.5 lbs

Project:	Туре:
Prepared By:	Date:

Lamp Info	Ballast Info			
Type	32w Triple	Type	Elec HPF QT	
Watts	32W	120V	0.31A	
Shape/Size	N/A	208V	N/A	
Base	N/A	240V	N/A	
ANSI	N/A	277V	N/A	
Hours	12,000	Input Watt	Input Watts 32W	
Lamp Lumen	s 2,400 lm			
Efficacy	75 lm/W			

## **Technical Specifications**

## Compliance

#### **UL Listed:**

Suitable for wet locations. Covered Ceiling Mount Only. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

#### **Electrical**

#### Sockets:

Medium base 4kv Pulse Rated Glazed porcelain

#### HID Quartz restrike:

Add suffix "/QR" to Van3 (50w restrike) or Van5 (100w restrike) for HOT restrike. Provides immediate illumination in case of momentary power failure.

## Quad Tap:

Fixture works with 120, 208, 240, and 277 volts

## Photocell:

Button photocell 120V included. Photocell is only compatible with 120V.

#### Optical

## Refractor:

Injection molded polycarbonate, designed for maximum structural strength

#### Construction

#### Housings:

Die-cast aluminum with powder coat bronze or white finish

## Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER).

#### Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

#### **Conduit Entry:**

1/2"

## **Ballast Minimum Starting Temperature:**

0°F


#### Other

#### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

# VAN3F32QT/PC



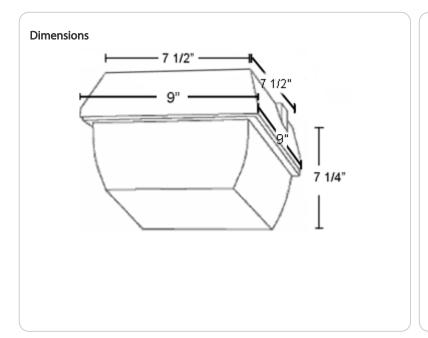

#### **Features**

Both Vandal proof Center Pin Torx and slotted Phillips head screws supplied

Tough polycarbonate refractors

Die cast aluminum housing

Quartz Restrike available, consult factory