



Large size ceiling mount fixture: 26 - 52 Watt compact fluorescent. Reflector is die formed heavy gauge steel in white finish with clear polycarbonate refractor. Lamp supplied.

Color: Clear

Weight: 6.3 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type	32w Triple
Watts	32W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	12,000
Lamp Lumens	2,400 lm
Efficacy	66.7 lm/W

Ballast Info

Type	Elec HPF QT
120V	0.31A
208V	0.25A
240V	0.26A
277V	0.13A
Input Watts	36W

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations. Covered Ceiling Mount Only. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

Electrical

Sockets:

Plug-in type, thermoplastic

Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts

Optical

Reflector:

Injection molded polycarbonate, designed for maximum structural strength

Construction

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER).

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

Ballast Minimum Starting Temperature:


0°F

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

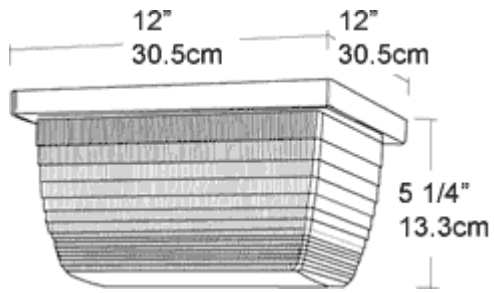

Features

- Backboxes available for conduit entry
- Both Vandal proof Center Pin Torx and slotted Phillips head screws supplied
- Tough polycarbonate refractor