



Large size ceiling mount fixture: 26 - 52 Watt compact fluorescent. Reflector is die formed heavy gauge steel in white finish with clear polycarbonate refractor. Lamp supplied.

Color: Clear

Weight: 6.3 lbs

Project:	Type:
Prepared By:	Date:

Lamp Info		Ballast Info	
Type	42W Triple	Type	Elec HPF QT
Watts	42W	120V	0.38A
Shape/Size	N/A	208V	0.3A
Base	N/A	240V	0.2A
ANSI	N/A	277V	0.17A
Hours	12,000	Input Watts	46W
Lamp Lumens	3,200 lm		
Efficacy	69.6 lm/W		

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations. Covered Ceiling Mount Only. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

Electrical

Sockets:

Plug-in type, thermoplastic

Photocell:

See product number VAN4F42QT/PC

Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts

Optical

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Construction

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER).

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

Ballast Minimum Starting Temperature:


0°F

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

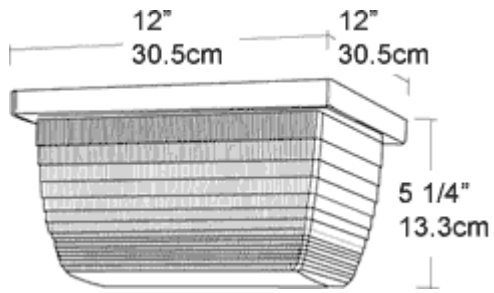

Features

Backboxes available for conduit entry

Both Vandal proof Center Pin Torx and slotted Phillips head screws supplied

Tough polycarbonate refractor