
VAN75W/E

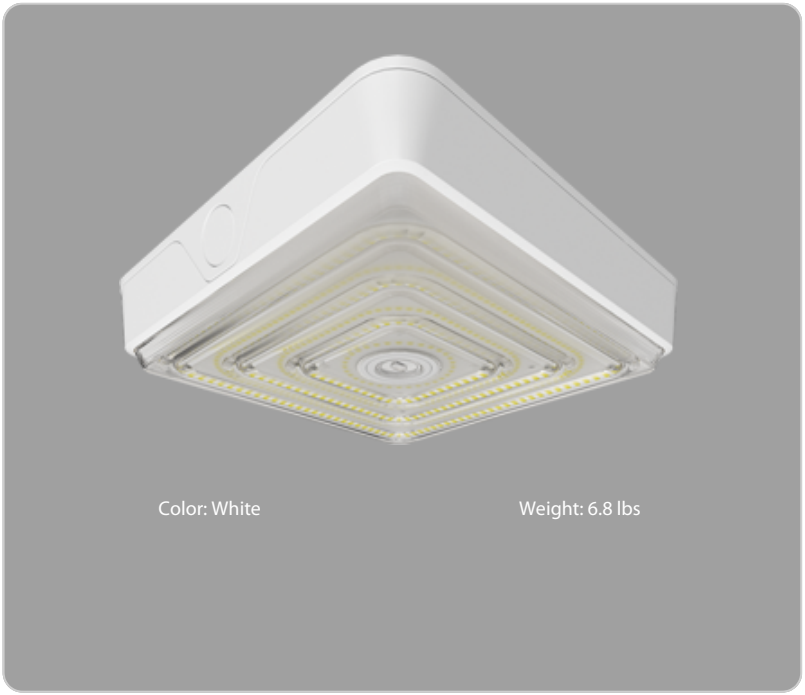

Color: White

Weight: 6.8 lbs

Project:	**Type:**
Prepared By:	**Date:**

Driver Info

Type	Constant Current
120V	0.64A/0.49A/0.33A
208V	0.37A/0.28A/0.19A
240V	0.32A/0.25A/0.16A
277V	0.28A/0.22A/0.15A
Input Watts	37.5-77W

LED Info

Watts	75/60/40W
Color Temp	3000K/4000K/5000K
Color Accuracy	83-85 CRI
L70 Lifespan	100,000 Hours
Lumens	5416-11247 lm
Efficacy	129.6-162.1 lm/W

Technical Specifications

Field Adjustability

Field Adjustable:
Field Adjustable Light Output:
75/60W/40W (factory default: 75W)
Color Temperature Selectable:
3000K, 4000K and 5000K (factory default:4000K)
Optics Field-Adjustable Garage/Canopy

Performance

Product Type:
Canopy Light

Lifespan:
100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

Compliance

UL Listed:
Suitable for wet locations

IESNA LM-79 & LM-80 Testing:
RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

IP Rating:
Ingress protection rating of IP66 for dust and water

LED Characteristics

Color Uniformity:
RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Construction

Lens:
Polycarbonate lens distributes light evenly and smoothly for general lighting applications

Cold Weather Starting:
The minimum starting temperature is -40°F (-40°C)

Maximum Ambient Temperature:
Suitable for use in up to 122°F (50°C)

Shape:
Square

Housing:
Precision die-cast aluminum housing and door frame

IK Rating:
IK08 Protected against 5 joules of impact. Equivalent to the impact of a 3.75 lbs. (1.7kg) mass dropped from 11.8" (300mm) above the impacted surface.

Finish:
Formulated for high durability and long-lasting color

Gaskets:
Ethylene Propylene Diene Monomer (EPDM)

Electrical

Driver:
Constant Current, Class 1, Non-Isolated, 120-277V 50/60 Hz;
75W: 120V: 0.64A, 208V: 0.37A, 240V: 0.32A, 277V: 0.28A
60W: 120V: 0.49A, 208V: 028A, 240V: 0.25A, 277V: 0.22A
40W: 120V: 0.33A, 208V: 0.19A, 240V: 0.16A, 277V: 0.15A

Dimming Driver:
Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Aux Power Supply:
Yes

Dim to Off:
Yes

Surge Protection:
6 kV

Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

Technical Specifications (continued)

Control Ready:
Integrated sensor port allows for simple, quick sensor attachment without the need for fixture modification or additional materials.

Installation

Mounting:
Retrofit mounting plates for ceiling mounting

Emergency Characteristics


Battery Backup:
Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V-277V.

Battery Backup Light Loss Factor:
Battery Backup Light Loss Factor:
75W: 0.16
60W: 0.21
40W: 0.32

Other

10-Year Combination Warranty:
The RAB 10-year combination warranty provides 5 years of no-compromise coverage and then a second 5 years of limited coverage. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

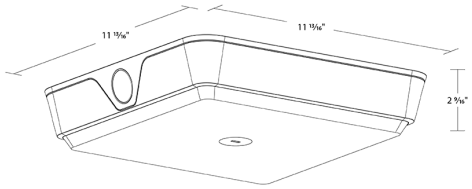

Features

- 100,000-Hour LED lifespan
- DLC Premium listed
- 0-10V Dimming
- IP66 Rated & IK08 Protection
- 10-Year, combined warranty

Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

Ordering Matrix

Family	Wattage	Color Temp	Optics	Finish	Driver	Battery Backup
VAN	75			W		/E
	40 = 40/30/20W **75 =** 75/60/40W	**Blank =** 3000/4000/5000K CCT Adjustable	**Blank =** FA Optics, Garage (155°) / Canopy (98°)	**Blank =** Bronze **W =** White	**Blank =** 120-277V **/480 =** 480V	**Blank =** None **/E =** Battery Backup

Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice