



Die cast aluminum construction with sturdy wall mounting bracket. Medium base socket and a variety of globes. incandescent lamp A21 for 100 Series, PS25 for 200 Series. Lamp not supplied.

Color: Silver

Weight: 2.8 lbs

Project:	Туре:
Prepared By:	Date:

Lamp Info Ballast Info			
Type	A19	Type	N/A
Watts	150W	120V	N/A
Shape/Size	N/A	208V	N/A
Base	N/A	240V	N/A
ANSI	N/A	277V	N/A
Hours	N/A	Input Watts	N/A
Lamp Lumen	s N/A		
Efficacy	N/A		

# **Technical Specifications**

# Compliance

# UL Listed:

Suitable for wet locations. Suitable for use in dwellings. Suitable for use with 90°C supply wiring. Complies with UL Standard 1598. For non-hazardous locations where the lamp, socket and wiring require protection from rain, corrosive fumes, noncombustible dusts, moisture, non-explosive vapors and gases.

### **Electrical**

# Wattage:

See catalog number chart for maximumWage with clear glass, colored glass and Permaglobes

### Socket:

Premium porcelain with 150°C 8" leads attached. Fastened with 2 stainless steel screws.

## **Maximum Watts:**

150W

# **Colored Globe Maximum Watts:**

100W

# Construction

#### Globes:

Supplied with clear heat resistant glass globes unless otherwise stated. Colored and white glass globes available. Unbreakable RAB Permaglobes available in clear and in color.

### **Optional Reflectors:**

Highly reflective white baked polyester epoxy powder finish over a heavy gauge aluminum base. Reflectors thread onto fixtures. See RV series.

# Die Cast Guard:


Supplied with one piece silver gray die cast guard with set screw

### Other

# **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.



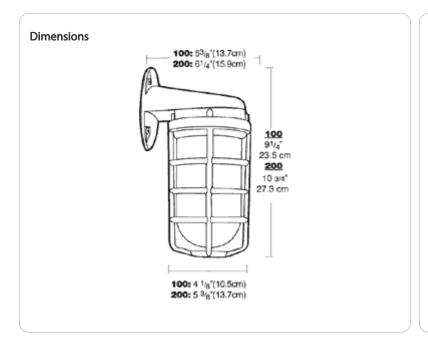

### **Features**

Set screw keeps guard securely in place

All stainless steel hardware

Close-up plugs allow Phillips or slotted screwdrivers for easy installation

High temperature silicone internal gaskets

Premium porcelain socket with 150C 8" long leads attached