



Die cast aluminum construction with sturdy wall mounting bracket. Medium base socket and a variety of globes. incandescent lamp A21 for 100 Series, PS25 for 200 Series. Lamp not supplied.

Color: Black

Weight: 4.3 lbs

Project:	Туре:
Prepared By:	Date:

Lamp Info		Ballast I	Ballast Info	
Type	A19	Туре	N/A	
Watts	200W	120V	N/A	
Shape/Size	N/A	208V	N/A	
Base	N/A	240V	N/A	
ANSI	N/A	277V	N/A	
Hours	N/A	Input Watts N/A		
Lamp Lume	ns N/A			
Efficacy	N/A			

# **Technical Specifications**

## Compliance

#### **UL Listed:**

Suitable for wet locations. Suitable for use in dwellings. Suitable for use with 90°C supply wiring. Complies with UL Standard 1598. For non-hazardous locations where the lamp, socket and wiring require protection from rain, corrosive fumes, noncombustible dusts, moisture, non-explosive vapors and gases.

### **Electrical**

### Wattage:

See catalog number chart for maximumWage with clear glass, colored glass and Permaglobes

#### Socket:

Premium porcelain with 150°C 8" leads attached. Fastened with 2 stainless steel screws.

### **Maximum Watts:**

200W

### **Colored Globe Maximum Watts:**

150W

### Construction

#### Globes:

Supplied with clear heat resistant glass globes unless otherwise stated. Colored and white glass globes available. Unbreakable RAB Permaglobes available in clear and in color.

#### **Optional Reflectors:**

Highly reflective white baked polyester epoxy powder finish over a heavy gauge aluminum base. Reflectors thread onto fixtures. See RV series.

## Wire Clamp Guard:


8 GA steel wire black powder coated

#### Other

#### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.



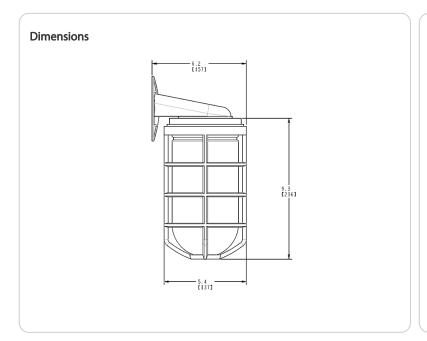

#### **Features**

Set screw keeps guard securely in place

All stainless steel hardware

Close-up plugs allow Phillips or slotted screwdrivers for easy installation

High temperature silicone internal gaskets

Premium porcelain socket with 150C 8" long leads attached