



Die cast aluminum construction. Mounts to existing surface or recessed 4" boxes. Adapter plate provided. Medium base socket and a variety of globes. incandescent lamp A21 for 100 Series, P525 for 200 series. Lamp not supplied.

Color: Natural

Weight: 1.1 lbs

|                     |              |
|---------------------|--------------|
| <b>Project:</b>     | <b>Type:</b> |
| <b>Prepared By:</b> | <b>Date:</b> |

| Lamp Info   |      | Ballast Info |     |
|-------------|------|--------------|-----|
| Type        | A19  | Type         | N/A |
| Watts       | 150W | 120V         | N/A |
| Shape/Size  | N/A  | 208V         | N/A |
| Base        | N/A  | 240V         | N/A |
| ANSI        | N/A  | 277V         | N/A |
| Hours       | N/A  | Input Watts  | N/A |
| Lamp Lumens | N/A  |              |     |
| Efficacy    | N/A  |              |     |

**Technical Specifications**

**Compliance**

**UL Listed:**

Suitable for wet locations. Suitable for use in dwellings. Suitable for use with 90°C supply wiring. Complies with UL Standard 1598. For non-hazardous locations where the lamp, socket and wiring require protection from rain, corrosive fumes, non-combustible dusts, moisture, non-explosive vapors and gases. For lamp base up installation only when outdoors.

**Construction**

**Globes:**

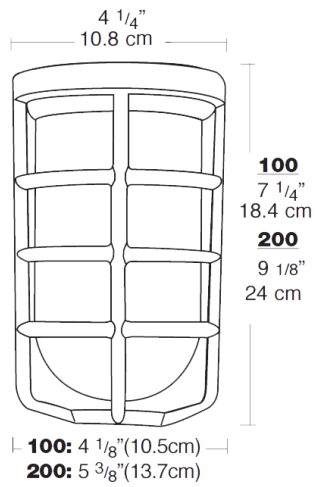
Supplied with clear thermal shock resistant soda lime glass unless otherwise stated. Colored and white glass globes available. Unbreakable Permaglobes available in clear and in color.

**No Guard or Globe Supplied:**

**Other**

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Dimensions****Features**

All stainless steel hardware

Close-up plugs allow Phillips or slotted screwdrivers for easy installation  
UL Listed for use with 90°C supply wiring OK for use in dwellings and wet locations

High temperature silicone internal gaskets

Premium porcelain socket with 150C 8" long leads

Clear heat resistant glass globes standard Polycarbonate Permoglobes sold separately