



Box mount, die cast aluminum with built-in junction box and sturdy mounting lugs. Medium base socket, 1/2" or 3/4" NPS hub size and a variety of globes. incandescent lamp A21 for 100 Series, P525 for 200 Series. Lamp not supplied.

Color: Natural

Weight: 2.8 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

| | |
|-------------|------|
| Type | A21 |
| Watts | 150W |
| Shape/Size | N/A |
| Base | N/A |
| ANSI | N/A |
| Hours | N/A |
| Lamp Lumens | N/A |
| Efficacy | N/A |

Ballast Info

| | |
|-------------|-----|
| Type | N/A |
| 120V | N/A |
| 208V | N/A |
| 240V | N/A |
| 277V | N/A |
| Input Watts | N/A |

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations. Suitable for use in dwellings. Suitable for use with 90°C supply wiring. Complies with UL Standard 1598. For non-hazardous locations where the lamp, socket and wiring require protection from rain, corrosive fumes, non-combustible dusts, moisture, non-explosive vapors and gases. For lamp base up installation only when outdoors.

Construction

Globes:

Supplied with clear thermal shock resistant soda lime glass unless otherwise stated. Colored and white glass globes available. Unbreakable Permaglobes available in clear and in color.

Die Cast Guard:

Supplied with one piece die cast guard with set screw

Hub Size:

3/4" Tapped

Electrical

Maximum Watts:

150W

Colored Globe Maximum Watts:

100W

Input Voltage:


120V

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

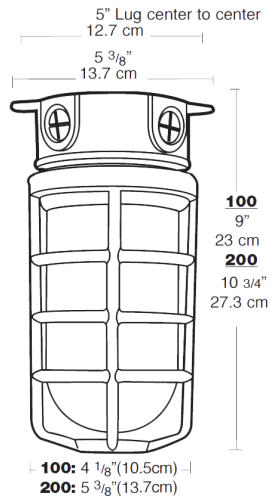

Features

- All stainless steel hardware
- Close-up plugs allow Phillips or slotted screwdrivers for easy installation
- Junction box with sturdy mounting lugs
- UL Listed for use with 90°C supply wiring OK for use in dwellings and wet locations
- High temperature silicone internal gaskets
- Premium porcelain socket with 150C 8" long leads