



Vaporproof CFL Ceiling 120V with Emergency Battery Backup. Lamp supplied.

Color: Bronze Weight: 8.8 lbs

Project:	Туре:
Prepared By:	Date:

Lamp Info	Ballast Info		
Type	26W Triple	Type	Elec HPF QT
Watts	26W	120V	N/A
Shape/Size	N/A	208V	N/A
Base	N/A	240V	N/A
ANSI	N/A	277V	0.11A
Hours	12,000	Input Watts	29W
Lamp Lumens	1,800 lm		
Efficacy	62.1 lm/W		

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations as a downlight

Electrical

THD:

7.5% at 120V, 7.1% at 277V

Battery Backup:

Bodine "Coldpak" will operate the CFL lamp fo 90 minutes if power fails. Rated -20°C to +55°C. Battery is a maintenance free NiCad with 7 - 10 year life. Wired for 277V.

Socket:

CFL White thermo plastic with integral clips for lamp retention

Construction

Globes:

Clear prismatic, heat resistant glass standard. White glass globes available. Colored and clear unbreakable RAB Permaglobes available for CFL only.

Optional Reflectors:

Highly reflective white baked polyester epoxy powder finish over a heavy gauge aluminum base. Reflectors thread onto fixtures.

Construction:

Die cast aluminum with stainless steel screws

Guard:

One piece die cast aluminum with set screw

Ballast Minimum Starting Temperature:


0° F

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.



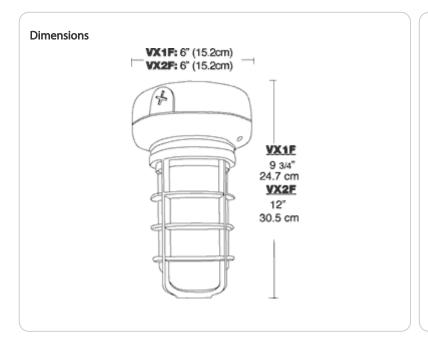

Features

Emergency battery backup meets NEC requirement
Test button for required maintenance checks
Indicator light illuminates when charging
Maintenance free NiCad battery has 7-10 year life
CFL lamp included