
RAB

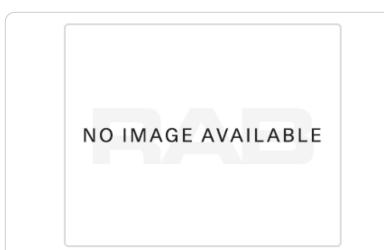

Box mount, die cast aluminum with built-in junction box and sturdy mounting lugs. Medium base socket, 1/2" or 3/4" NPS hub size and a variety of globes. incandescent lamp A21 for 100 Series, PS25 for 200 Series. Lamp not supplied.

Color: Natural

Weight: 3.3 lbs

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations. Suitable for use in dwellings. Suitable for use with 90°C supply wiring. Complies with UL Standard 1598. For non-hazardous locations where the lamp, socket and wiring require protection from rain, corrosive fumes, noncombustible dusts, moisture, non-explosive vapors and gases. For lamp base up installation only when outdoors.

Construction

Globes:

Supplied with clear thermal shock resistant soda lime glass unless otherwise stated. Colored and white glass globes available. Unbreakable Permaglobes available in clear and in color.

No Guard Supplied:

Hub Size: 3/4" Tapped

Electrical

Maximum Watts: 300W

Colored Globe Maximum Watts: 200W

Project:		Туре	Туре:	
Prepared By:		Date:		
Lamp Info		Ballast I	Ballast Info	
Туре	PS25	Туре	N/A	
Watts	300W	120V	N/A	
Shape/Size	N/A	208V	N/A	

240V

277V

Input Watts N/A

N/A

N/A

Input Voltage: 120V

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Base

ANSI

Hours

Efficacy

Lamp Lumens N/A

N/A

N/A


N/A

N/A

VX200-3/4



Dimensions



Features

All stainless steel hardware

Close-up plugs allow Phillips or slotted screwdrivers for easy installation

Junction box with sturdy mounting lugs

UL Listed for use with 90°C supply wiring OK for use in dwellings and wet locations

High temperature silicone internal gaskets

Premium porcelain socket with 150C 8" long leads