

# NO IMAGE AVAILABLE

Box mount, die cast aluminum with built-in junction box and sturdy mounting lugs. Medium base socket, 1/2" or 3/4" NPS hub size and a variety of globes. incandescent lamp A21 for 100 Series, PS25 for 200 Series. Lamp not supplied.

Color: Black

Weight: 3.3 lbs

Project:	Туре:
Prepared By:	Date:

Lamp Info		Ballast Info	Ballast Info	
Type	PS25	Type	N/A	
Watts	300W	120V	N/A	
Shape/Size	N/A	208V	N/A	
Base	N/A	240V	N/A	
ANSI	N/A	277V	N/A	
Hours	N/A	Input Watts	N/A	
Lamp Lumen	s N/A			
Efficacy	N/A			

# **Technical Specifications**

# Compliance

#### **UL Listed:**

Suitable for wet locations. Suitable for use in dwellings. Suitable for use with 90°C supply wiring. Complies with UL Standard 1598. For non-hazardous locations where the lamp, socket and wiring require protection from rain, corrosive fumes, noncombustible dusts, moisture, non-explosive vapors and gases. For lamp base up installation only when outdoors.

# Construction

## Globes:

Supplied with clear thermal shock resistant soda lime glass unless otherwise stated. Colored and white glass globes available. Unbreakable Permaglobes available in clear and in color.

#### No Guard Supplied:

#### **Electrical**

#### **Maximum Watts:**

300W

### **Colored Globe Maximum Watts:**

2001/

# Input Voltage:

120V


#### Other

#### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**VX200B** 



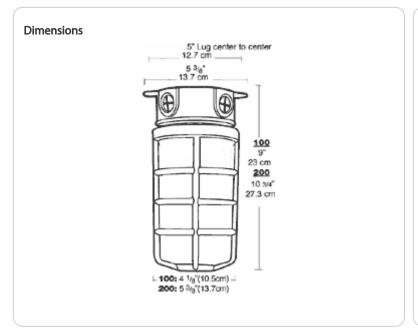

#### Features

All stainless steel hardware

Close-up plugs allow Phillips or slotted screwdrivers for easy installation

Junction box with sturdy mounting lugs

UL Listed for use with 90°C supply wiring OK for use in dwellings and wet locations

High temperature silicone internal gaskets

Premium porcelain socket with 150C 8" long leads