
# RAB

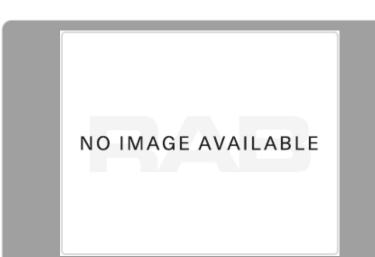

Box mount, die cast aluminum with built-in junction box and sturdy mounting lugs. Medium base socket, 1/2" or 3/4" NPS hub size and a variety of globes. incandescent lam A21 for 100 Series. PS25 for 200 Series. Lamp not supplied.

Color: White

Weight: 3.3 lbs

Technical	Specifications
reennear	specifications

#### Compliance

### UL Listed:

Suitable for wet locations. Suitable for use in dwellings. Suitable for use with 90°C supply wiring. Complies with UL Standard 1598. For non-hazardous locations where the lamp, socket and wiring require protection from rain, corrosive fumes, noncombustible dusts, moisture, non-explosive vapors and gases. For lamp base up installation only when outdoors.

## Construction

### Globes:

Supplied with clear thermal shock resistant soda lime glass unless otherwise stated. Colored and white glass globes available. Unbreakable Permaglobes available in clear and in color.

#### No Guard Supplied:

Hub Size: 3/4" Tapped

## Electrical

Maximum Watts: 300W

Colored Globe Maximum Watts: 200W

Project: Prepared By:		Туре:				
			Date:			
Lamp Info		Ballast I	nfo			
Туре	PS25		Туре	N/A		
Watts	300W		120V	N/A		
Shape/Size	N/A		208V	N/A		

240V

277V

Input Watts N/A

N/A

N/A

Input Voltage: 120V

Other

#### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Base

ANSI

Hours

Efficacy

Lamp Lumens N/A

N/A

N/A

N/A

N/A

VX200W-3/4

## RAB