



Ultra-economy wall pack with a sleek, contemporary look.

Color: Bronze

Weight: 4.7 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	30W
120V	0.25A	Color Temp	5000K (Cool)
208V	0.15A	Color Accuracy	83 CRI
240V	0.13A	L70 Lifespan	50,000 Hours
277V	0.11A	Lumens	2,898 lm
Input Watts	24.6W	Efficacy	117.8

**Technical Specifications**

**Compliance**

**UL Listed:**

Suitable for wet locations. Suitable for mounting within 4 feet of the ground.

**Trade Agreements Act Compliant:**

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

**DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: S-T3CXDV

**Electrical**

**Driver:**

Constant Current, Class P, 120-277V, 50/60Hz, 120V: 0.25A, 208V: 0.15A, 240V: 0.13A, 277V: 0.11A

**THD:**

3.27% at 120V, 6.24% at 277V

**Power Factor:**

99.7% at 120V, 94.8% at 277V

**Surge Protection:**

2.5kV

**Photocell:**

120-277V Button photocell included. Photocell is compatible with 120V-277V.

**Other**

**Note:**

All values are typical (tolerance +/- 10%)

**Replacement:**

Replaces up to 100W Metal Halide

**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Performance**

**Lifespan:**

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**LED Characteristics**

**LEDs:**

Long-life, high-efficacy, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Construction**

**Cold Weather Starting:**

The minimum starting temperature is -40°C (-40°F)

**Maximum Ambient Temperature:**

Suitable for use in up to 40°C (104°F)

**Mounting:**

Housing contains two (2) conduit entry points, one on each side, and knockout pattern for junction box or direct wall mounting.

**Lens:**

Glass

**Gaskets:**

High-temperature silicone

**Green Technology:**


Mercury and UV free. RoHS-compliant components.

## Technical Specifications (continued)

### Finish:

Formulated for high durability and long-lasting color

### Dimensions

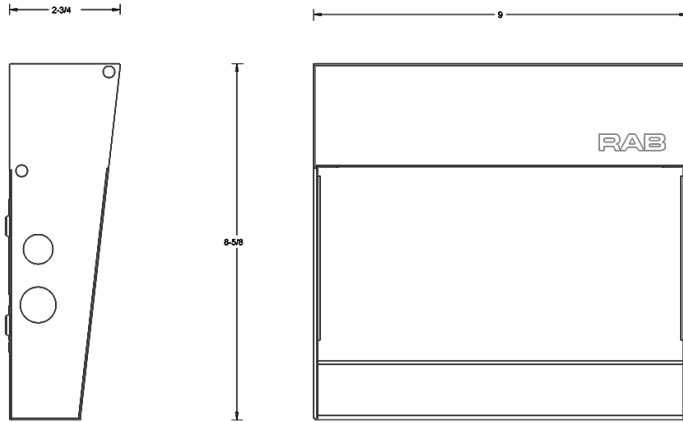

### Features

Ultra-economy wall pack with a sleek, contemporary look

Covers footprint of small HID wall packs

Available in various lumen packages

### Ordering Matrix

Family	Lumen Package	Color Temp	Options
W17	30L		/PCU
	<b>30L</b> = Small (2900lm, 30W) <b>36L</b> = Small (3600lm, 33W) <b>55L</b> = Medium (5500lm, 50W) <b>75L</b> = Medium (7500lm, 69W) <b>90L</b> = Medium (9000lm, 86W) <b>150L</b> = Large (15000lm, 139W)	<b>Blank</b> = 5000K Cool <b>N</b> = 4000K Neutral <b>Y</b> = 3000K Warm	<b>Blank</b> = No Option <b>/PCU</b> = 120-277V Button Photocell