



Ultra-economy wall pack with a sleek, contemporary look.

Color: Bronze

Weight: 6.5 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	86W
120V	0.72A	Color Temp	5000K (Cool)
208V	0.42A	Color Accuracy	83 CRI
240V	0.36A	L70 Lifespan	50,000 Hours
277V	0.31A	Lumens	9,296 lm
Input Watts	75.1W	Efficacy	123.7

**Technical Specifications**

**Compliance**

**UL Listed:**

Suitable for wet locations. Suitable for mounting within 4 feet of the ground.

**Trade Agreements Act Compliant:**

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

**DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: S-Q2LNSW

**Electrical**

**Driver:**

Constant Current, Class P, 120-277V, 50/60Hz, 120V: 0.72A, 208V: 0.42A, 240V: 0.36A, 277V: 0.31A

**THD:**

3.13% at 120V, 6.48% at 277V

**Power Factor:**

99.6% at 120V, 95.4% at 277V

**Surge Protection:**

2.5kV

**Other**

**Note:**

All values are typical (tolerance +/- 10%)

**Replacement:**

Replaces up to 250W Metal Halide

**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Performance**

**Lifespan:**

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**LED Characteristics**

**LEDs:**

Long-life, high-efficacy, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Construction**

**Cold Weather Starting:**

The minimum starting temperature is -40°C (-40°F)

**Maximum Ambient Temperature:**

Suitable for use in up to 40°C (104°F)

**Mounting:**

Housing contains two (2) conduit entry points, one on each side, and knockout pattern for junction box or direct wall mounting.

**Lens:**

Glass

**Gaskets:**

High-temperature silicone


**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**Finish:**

Formulated for high durability and long-lasting color

## Dimensions

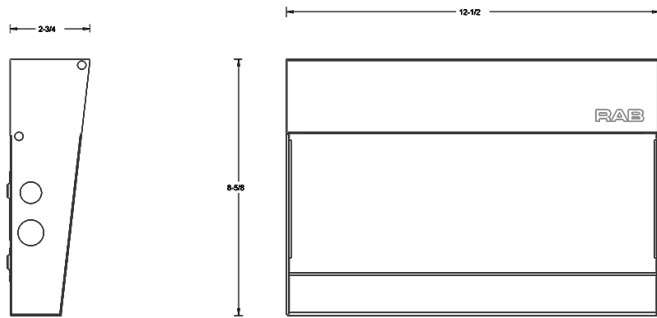

## Features

- Ultra-economy wall pack with a sleek, contemporary look
- Covers footprint of medium-sized HID wall packs
- Available in various lumen packages

## Ordering Matrix

Family	Lumen Package	Color Temp	Options
W17	90L		
	<b>30L</b> = Small (2900lm, 30W) <b>36L</b> = Small (3600lm, 33W) <b>55L</b> = Medium (5500lm, 50W) <b>75L</b> = Medium (7500lm, 69W) <b>90L</b> = Medium (9000lm, 86W) <b>150L</b> = Large (15000lm, 139W)	<b>Blank</b> = 5000K Cool <b>N</b> = 4000K Neutral <b>Y</b> = 3000K Warm	<b>Blank</b> = No Option <b>/PCU</b> = 120-277V Button Photocell