

Color: Bronze

Weight: 9.5 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant	Watts	60/50/40/30W
120V	N/A	Color Temp	N/A
208V	N/A	Color Accuracy	82-85 CRI
240V	N/A	L70 Lifespan	100,000 Hours
277V	N/A	Lumens	3,572-9,211 lm
Input Watts	28.6-62.1W	Efficacy	116.5-160 lm/W

**Technical Specifications**

**Lightcloud**

**Lightcloud Blue Installed:**

Lightcloud Blue is a Bluetooth Mesh wireless lighting control system that allows you to control RAB's various compatible devices. With RAB's patented Rapid Provisioning technology, devices can be quickly and easily commissioned for residential and large commercial applications using the Lightcloud Blue mobile app. Each device in a system can communicate with any other device, eliminating the need for a Gateway or Hub and maximizing the control system's reach.

DLC system - N1XMLOEATBA (Interior);  
NHCZ2BIA17L (Exterior)

Learn more at  
[www.rablighting.com/feature/new-lightcloud-blue](http://www.rablighting.com/feature/new-lightcloud-blue).

**Gateway Required:**

No

**Communication Protocol:**

Bluetooth Mesh

**SmartShift:**

No

**Range:**

Indoor: Up to 60 feet between standard building materials. Building materials such as brick, concrete, and steel construction may require additional Lightcloud Blue devices to extend around an obstruction; Up to 200 feet clear line of sight.

Outdoor: Up to 60 feet clear line of sight; Up to 18 feet around corners.

**Spacing Criteria:**

Lightcloud Blue devices should be placed within the specified range to communicate within the Bluetooth Mesh network.

**Factory Reset:**

Method 1: Delete from App  
Open the app and access the device settings for the paired device. Be sure that the device is online and select 'Delete'. The device will flash on/off 3x and return to full brightness.

Method 2: Manual

Locate the device identification button at the top of the Controller under the Lightcloud logo. Press and hold this button for 10s or until the indicator light begins flashing red. If the Controller is attached to a fixture, the fixture will also flash on/off 3x.

**Performance**

**Product Type:**

Wall Pack

**Description:**

Field-adjustable wall packs with selectable throw. Available in three sizes, from 15W - 150W. Now available with Lightcloud Blue and integrated occupancy sensor

**Wattage Equivalency:**

60W: Replaces up to 250W Metal Halide (MH) or 200W High Pressure Sodium (HPS)  
50W: Replaces up to 250W Metal Halide (MH) or 200W High Pressure Sodium (HPS)  
40W: Replaces up to 175W Metal Halide (MH) or 150W High Pressure Sodium (HPS)  
30W: Replaces up to 150W Metal Halide (MH) or 100W High Pressure Sodium (HPS)

**Input Wattage:**

60/50/40/30W, factory default 60W

**Lumens (Nominal):**

9,000/7,500/6,000/4,500lm @ 4000K

**Efficacy:**

150lm/W

**Sensor Settings**

**Lifespan:**

100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

**Sensor Connection Type:**

Integrated

**Technical Specifications (continued)****Max Mounting Height:**

8 to 12 feet

**Sensor Technology:**

Microwave (MVS)

**Default Setting:**

Uncommissioned State:

Motion Sensitivity: High

Brightness when triggered : 100%

Hold time: 20 minutes

Standby to dim: 20%

Standby time: 1 minute

When vacant: Off

Daylight Sensing: Disabled

Photocell: Disabled

Commissioned State:

Once pair, the sensor will default to disabled. Once enabled the following settings apply:

Motion Sensitivity: High

Brightness when triggered: Last on status

Hold time: 20 minutes

Standby to dim: 20%

Standby time: 1 minute

When vacant: Off

Daylight Sensing: Disabled

Photocell: Disabled

**Adjustable Sensor Settings?:**

Yes, using the Lightcloud Blue mobile app

**Sensing Type:**

Occupancy, Vacancy

**Occupied Actions:**

On or On at a Dim Level

**Vacant Actions:**

Off or On at a Dim Level

**Occupancy Timeout:**

1 minute to 240 minutes

**Daylight Sensing:**

Dim levels will continuously adjust based on the daylight threshold level set in the Lightcloud Blue mobile app. Settings adjustable using the Lightcloud Blue mobile app

**Electrical****Driver:**

Constant Current, Class 2 120-277V 50/60 Hz; 120V: mA; 208V: mA; 240V: mA; 277V: mA

**THD:**

&lt;20%

**Power Factor:**

0.9

**Dimmable:**

Yes via the Lightcloud Blue mobile app and devices. This product will not operate properly when connected to a standard/0-10V dimmer or dimming control.

**Input Voltage:**

120-277V

**Operating Frequency:**

50/60Hz

**Operating Temperature:**

-40°F to 104°F (-40°C to -40°C)

**Flicker:**

&lt;30%

**Surge Protection:**

DM 4 kV+ CM 6 kV

**Emergency Fixture Use:**

Yes, can be used as an emergency fixture

**Detection Range:**

20 ft diameter at 9 ft mounting height

**Photocell:**

Integrated photocell included with on/off switch, factory default set to OFF. Once photocell is enabled on the fixture, the settings are adjustable using the Lightcloud Blue mobile app

**LED Characteristics****Beam Angle:**

Adjustable throw (0°, 15°, 30° & 45°); factory default 45°

**Color Temperature:**

Field adjustable via dip switch 3000/4000/5000K, factory default 4000K

**Color Tuning:**

No, the color cannot be adjusted using the Lightcloud Blue mobile app

**Color Accuracy (CRI):**

80 CRI

**Natural Spectrum:**

No

**Color Consistency:**

<7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

**Installation****Mounting:**

Surface mount for recessed junction box; 3 conduit entry points

**Construction****Size:**

Medium

**Shape:**

Rectangle

**Finish:**

Bronze

**Enclosure Material:**

Aluminum

**Lens Finish:**

Clear

**Lens:**

Glass

**Compliance****Listings:**

UL Listed, UL Classified

**Environment:**

Suitable for use indoors and outdoors in dry, damp, or wet environments.

**Energy Star Approved:**

No

**DLC NLC Listed:**

This product is on the Design Lights Consortium (DLC) Network Lighting Controls (NLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

DLC system - N1XMLOEATBA (Interior); NHCZ2BIA17L (Exterior)

**DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

**California Title 20 Compliant:**

No

## Technical Specifications (continued)

### California Title 24 JA8 Compliant:

No

### California Energy Commission (CEC) Status:

Lawful for Sales in California

### NSF Listed:

No

### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA lm-79 and lm-80.

### RoHS:

Mercury and UV free. RoHS-compliant components.

### FCC:

Complies with Part 15 of the FCC Rules

### Other

#### Compatible Products:


Combine with other Lightcloud Blue devices and fixtures to expand your system. Visit [rablighting.com/controls/LIGHTCLOUD\\_BLUE](http://rablighting.com/controls/LIGHTCLOUD_BLUE).

#### Compatible Accessories:

W22-[S/M/L]-WG

Wire guard for W22

## Dimensions

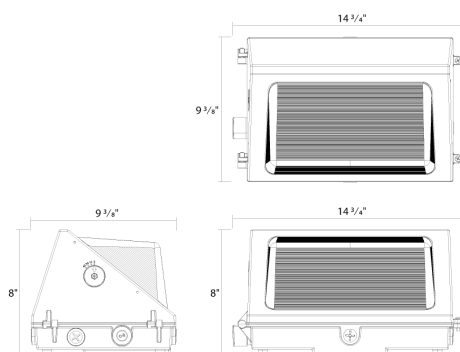

## Features

100,000-Hour LED lifespan

0-10V dimming standard

5-Year, limited warranty

## Ordering Matrix

Family	Housing Size	Wattage	Color Temp	Finish	Forward Throw	Driver	Controls	Battery Backup
W22	M	60				/480	/LCBS/MVS	
	<b>M =</b> Medium <b>L =</b> Large <b>S =</b> Small	<b>30 =</b> 30/25/20/15W <sup>1</sup> <b>60 =</b> 60/50/40/30W <sup>2</sup> <b>100 =</b> 100/85/70/50W <sup>2</sup> <b>150 =</b> 150/125/100/75W <sup>3</sup>	<b>Blank =</b> 3000/4000/5000K Adjustable	<b>Blank =</b> Bronze <b>W =</b> White	<b>Blank =</b> Adjustable Throw 0°/15°/30°/45°	<b>Blank =</b> 120-277V <b>/480 =</b> 480V	<b>Blank =</b> Selectable Photocell <b>/LCBS/MVS =</b> Selectable Photocell w/Lightcloud Blue MVS Sensor	<b>Blank =</b> None <b>/E =</b> Battery Backup

<sup>1</sup> S (Small) models only

<sup>2</sup> M (Medium) models only

<sup>3</sup> L (Large) models only

<sup>4</sup> Battery backup available only on M (Medium) and L (Large) models with 120-277V